

EAST CAMDEN, ARKANSAS


DRA-EAST CAMDEN DRAINAGE

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	1	E.A.	Perform asphalt street cut, remove existing culvert and install Double-3'x4'(60 LF) per plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	18	E.A.	Provide and install concrete headwalls per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/E.A.		
4	643	S.F.	Provide and install asphalt street repair including all labor, materials, grading and compaction needed for the installation of asphalt street repair for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.		
5	1150	L.F.	Regrade all ditches as need to restore unobstructed flow and stabilization as necessary per the plans for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

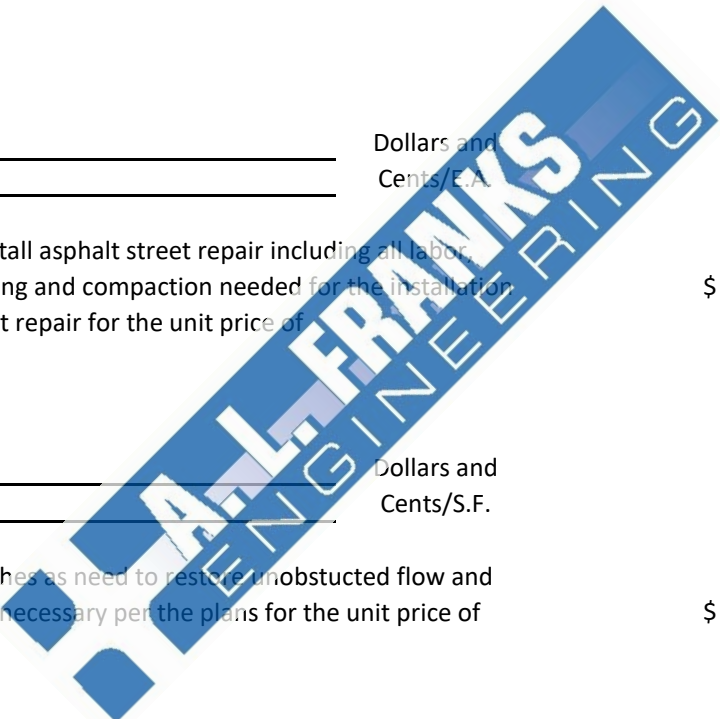

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
6	1020	L.F.	Furnish and intall 24" HDPE per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and Cents/L.F.		
7	4340	S.F.	Provide and install concrete repair including all labor, materials, grading and compaction needed for the installation of concrete street repair for the unit price of	\$ _____	\$ _____
			_____ Dollars and Cents/S.F.		
8	1	E.A.	Provide and install 6'x6' concrete catch basin per plans and specifications	\$ _____	\$ _____
			_____ Dollars and Cents/E.A.		

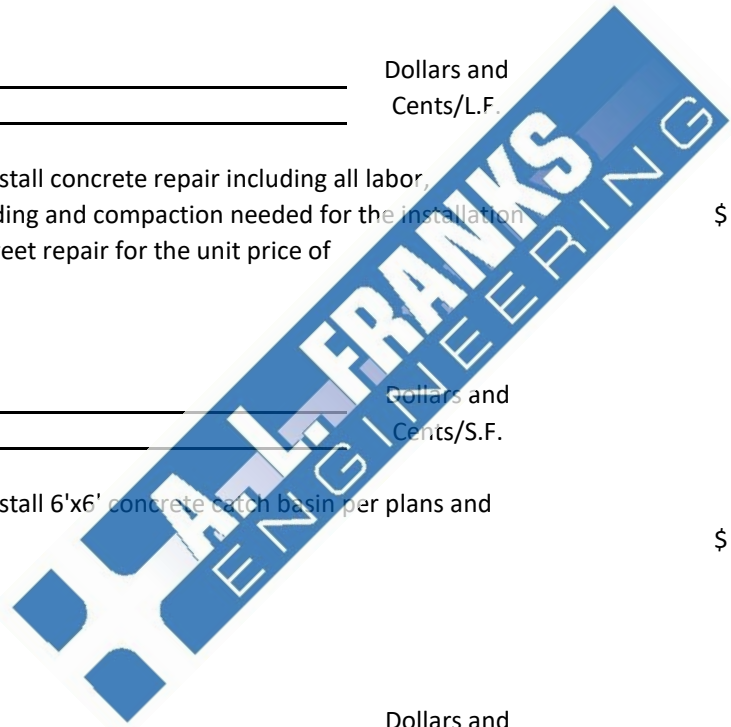

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	80	L.F.	Furnish and intall 36" HDPE per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
10	260	L.F.	Replace 4" PVC force main, test and tie-in per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
11	400	S.F.	Furnish all equipment, material, and labor to install 12"-18" Rip Rap drainage (24" Min. Depth) 35 lb. min. on filter fabric including any grading or suitable backfill per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.	_____	_____
TOTAL BASE BID ITEMS 1-11				\$ _____	

BID PROPOSAL CONTINUED

DEDUCTIVE ALTERNATE #1 (SHEETS 5 AND 6)

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	10	EA	Deduct from Item 3: Provide and install concrete headwalls per the plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
2	210	S.F.	Deduct from Item 4: Provide and install asphalt street repair including all labor, materials, grading and compaction needed for the installation of asphalt street repair for the unit price of _____ Dollars and _____ Cents/S.F.	\$ _____	\$ _____
3	425	L.F.	Deduct from Item 5: Regrade all ditches as need to restore unobstructed flow and stabilization as necessary per the plans for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
4	400	L.F.	Deduct from Item 6: Furnish and intall 24" HDPE per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
5	1510	S.F.	Deduct from Item 7: Provide and install concrete repair including all labor, materials, grading and compaction needed for the installation of concrete street repair for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.		
6	80	L.F.	Deduct from Item 9: Furnish and intall 36" HDPE per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
TOTAL DEDUCTIVE ALTERNATE #1				\$ _____	
TOTAL BASE LESS DEDUCTIVE ALTERNATE #1				\$ _____	

