


CITY OF EL DORADO, ARKANSAS

10TH STREET DRAINAGE


BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	1	L.S.	Removal and disposal including, but not limited to culverts, junction boxes, headwalls, concrete sidewalks, curbs, gutters, asphalt sections, trees, brush, and any unclassified excavation as directed by the engineer including all necessary saw cutting as shown on the plans for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

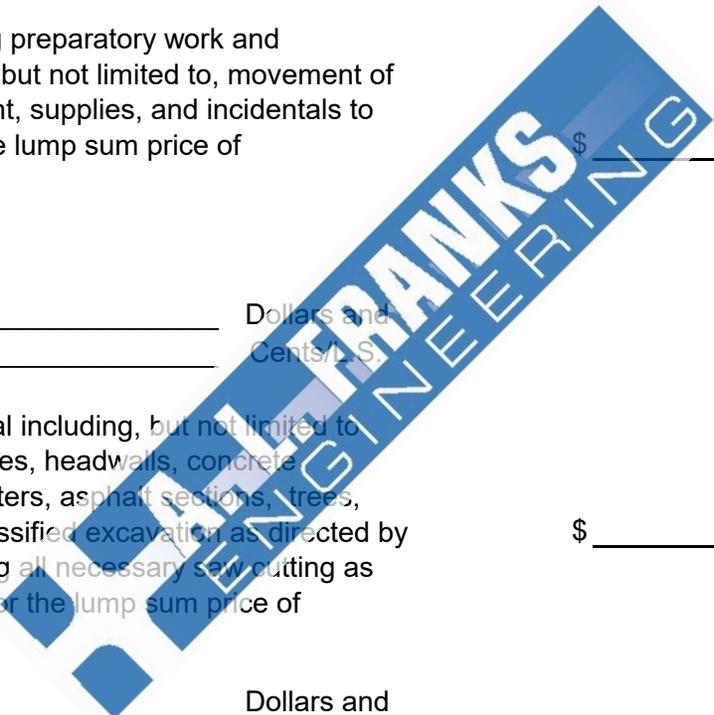


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	400	L.F.	Furnish and Install all material, labor, and equipment, for placement of cast in place double 10'x8' box culverts including grading, subgrade, compaction, concrete, reinforcement, and any incidentals to the project site as shown on the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
4	1	L.S.	Furnish and Install all material, labor, and equipment, for placement of cast in place headwall and wing walls for a 30 degree skewed culvert including grading, subgrade, compaction, concrete, reinforcement, and any incidentals to the project site as shown on the plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

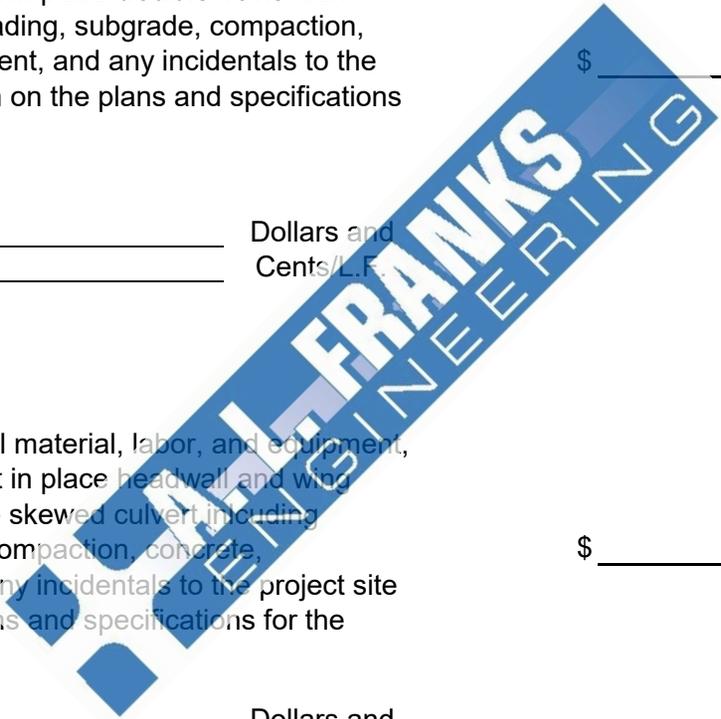


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	1	L.S.	Furnish and Install all material, labor, and equipment, for placement of cast in place headwall and wing walls for a straight culvert including grading, subgrade, compaction, concrete, reinforcement, and any incidentals to the project site as shown on the plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
6	1,370	S.F.	Furnish and Install all material, labor, and equipment, for placement of 6" slab inside of headwalls including grading, subgrade, toe wall, concrete, reinforcement, and any incidentals to the project site as shown on the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.F.	\$ _____	\$ _____

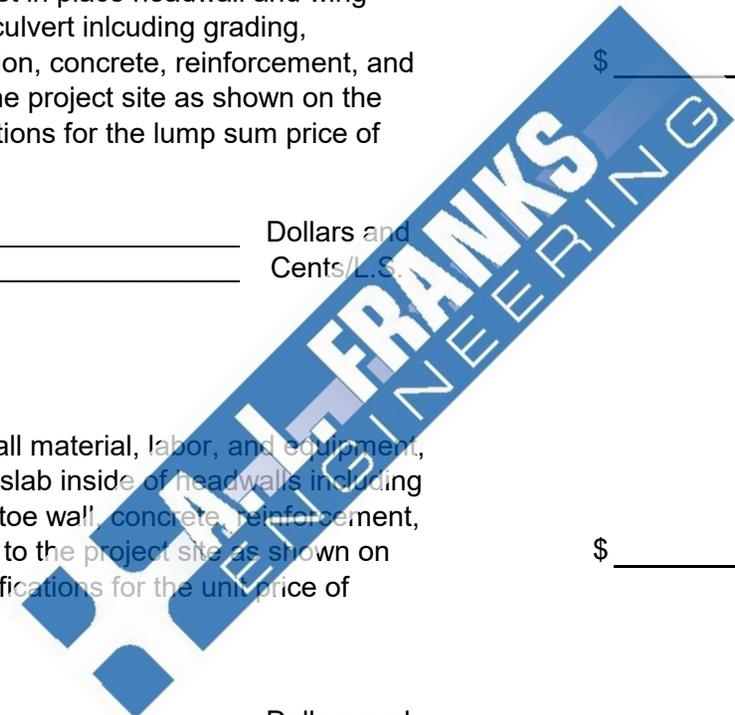


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	2,220	S.F.	Furnish all equipment, material, and labor to install 12"-18" Rip Rap drainage (24" Min. Depth) 35 lb. min. on filter fabric including any grading or suitable backfill per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.F.	\$ _____	\$ _____
8	3,085	S.F.	Furnish and Install cement stabilization (6-inch thick) (30 lb/sy) of native subgrade/base including cement, labor, and all equipment necessary to install and compact per plans and specifications for the unit price of _____ Dollars and _____ Cents/S.F.	\$ _____	\$ _____

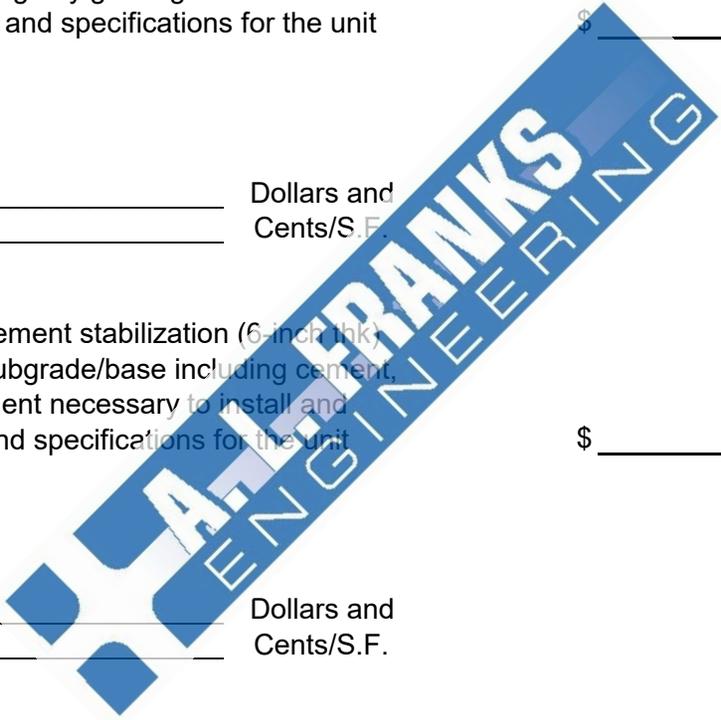


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
9	3,085	S.F.	Furnish and Install reinforced concrete pavement (8-inch thk) including reinforcement, curing compound, and all incidental labor and materials per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.		
10	122	L.F.	Laydown Concrete curb including sawcut line on the edge of asphalt per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

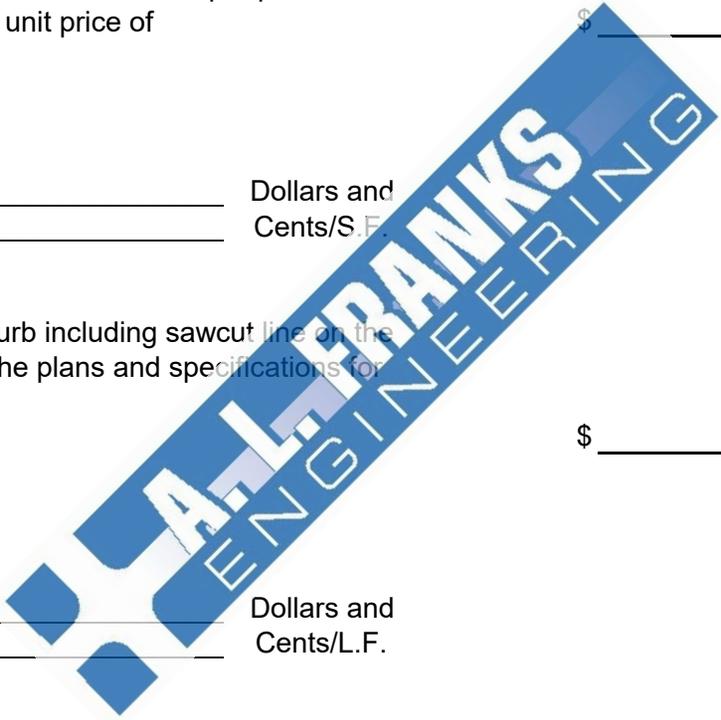


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
11	215	L.F.	6" Concrete curb and Gutter including sawcut line on the Edge of asphalt per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
12	1,150	S.F.	Concrete flatwork 4" thick including any grading, paving sand, reinforcement, Etc. per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.		

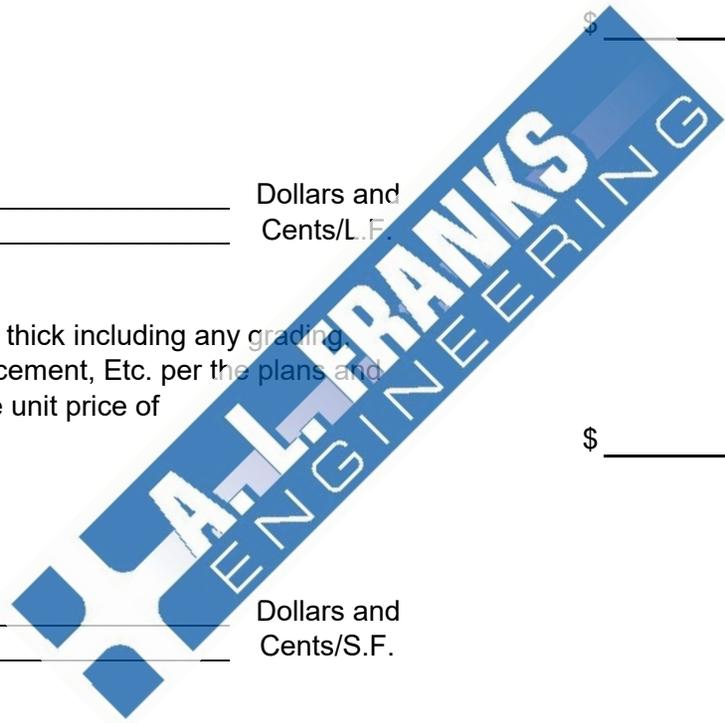


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
13	7,100	CCY.	Furnish and install all material, labor, and equipment to install select fill after culverts are installed including compaction in 1' lifts and fine grading per the plans and specifications for the compacted cubic yard price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/CCY.		
14	50	C.Y.	Furnish and install all material, labor, and equipment to install class 7 crushed stone around parking lot area and grade for positive drainage per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/C.Y.		

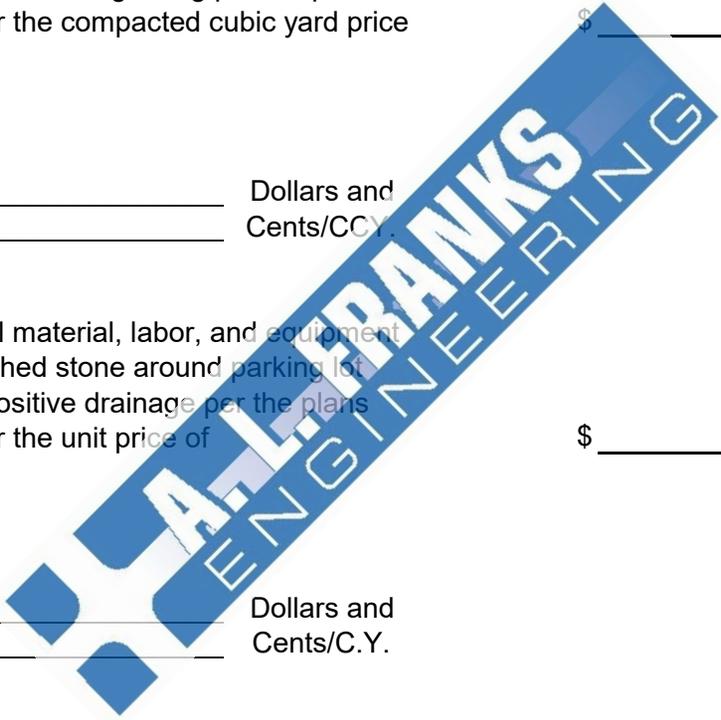

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
15	2,100	S.F.	Furnish and install all material, labor, and equipment to install 4" of top soil and place sod 6' wide along the drainage ditch flow line per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.		
16	20,000	S.F.	Furnish and install all material, labor, and equipment to install 4" of top soil and place landlok erosion control blanket or approved equal and grass seed per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.		

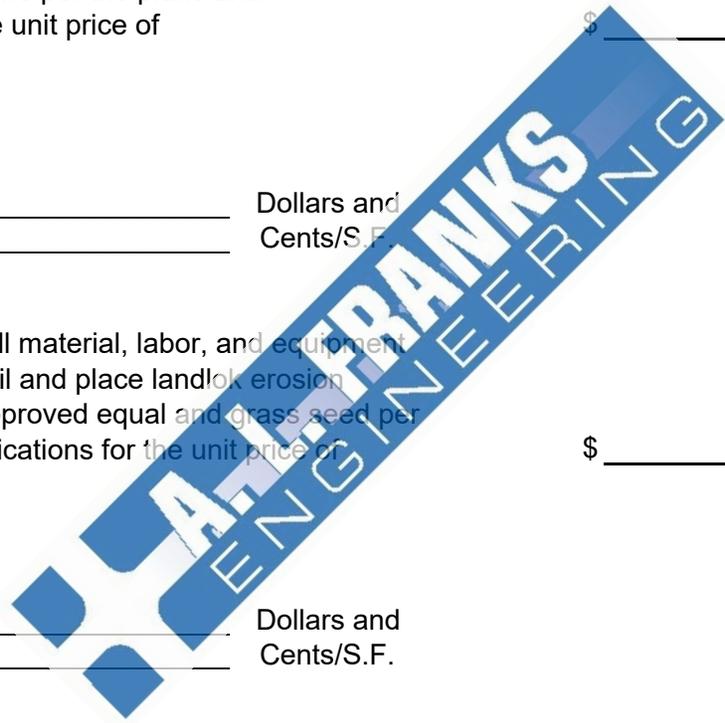


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
17	80	L.F.	Furnish and install all material, labor, and equipment to install 24" HDPE drain pipe on grade including existing pipe tie in, box culvert tie in, anchor ties, all bedding material, initial class 7 backfill around the pipe, and select fill backfill compacted in 6" lifts back to grade per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
18	50	L.F.	Furnish and install all material, labor, and equipment to reinstall handrail along the top of the headwall including any grinding, painting, welding, and anchor bolts per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
19	1	L.S.	Furnish and install all material, labor, and equipment to install 6"x6" junction box per the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
20	1	L.S.	Furnish and install all material, labor, and equipment to install 11' curb inlet and catch basin including box, throat, top, manhole, and any incidentals to the project site per the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

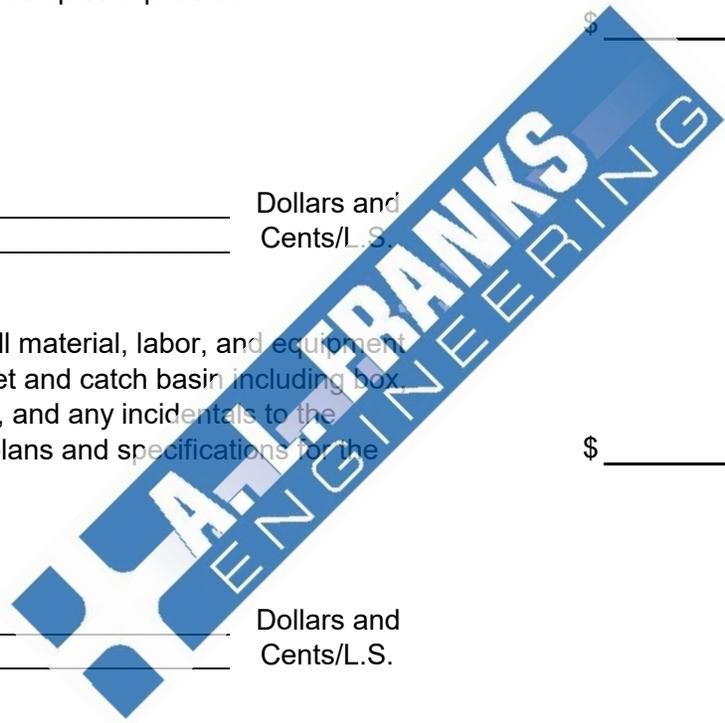


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
21	1	L.S.	Furnish and install all material, labor, and equipment for a 5' sidewalk drain with a diamond plate steel top to be bolted per the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
22	80	L.F.	Furnish and install all material, labor, and equipment to install a minimum of 80 L.F. of class 8" ductile iron sewer main including fernco couplings, bedding material, by pass pump during construction, and any incidentals on the project site per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

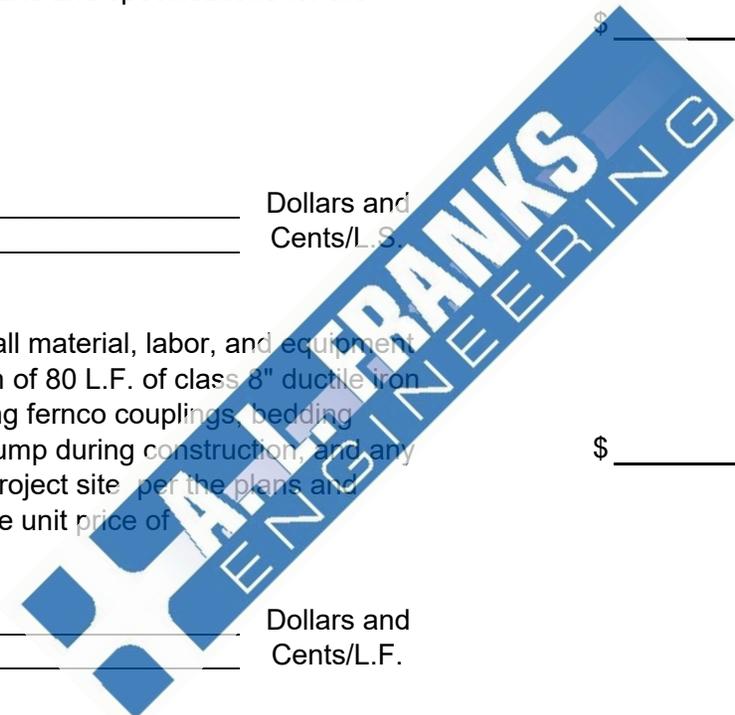


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
23	1	L.S.	Furnish and install all material, labor, and equipment to relocate existing utilities as needed to install the proposed drainage including, water main, water meter, water services, manhole lids, etc. per the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
24	100	C.Y.	Furnish and install all material, labor, and equipment to install flowable fill as required or directed by the engineer per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/C.Y.		

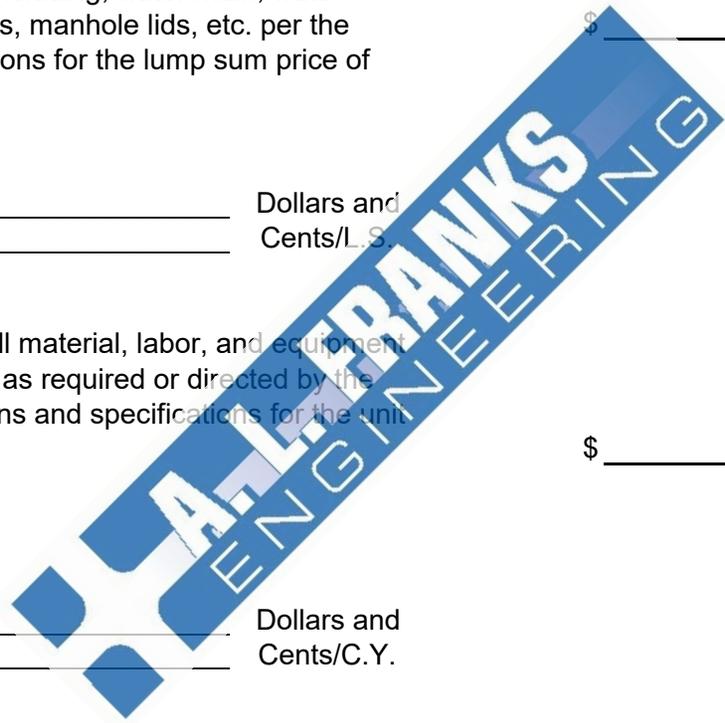

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
25	1	L.S.	Trench safety per plans and specifications for the unit price of		
				\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
26	1	L.S.	Furnish and Install Traffic Control Devices, signs, barricades, and flaggers including but not limited to installing, maintaining, and moving from one location to another and removing traffic control devices according to the plans and specifications for the lump sum price of		
				\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

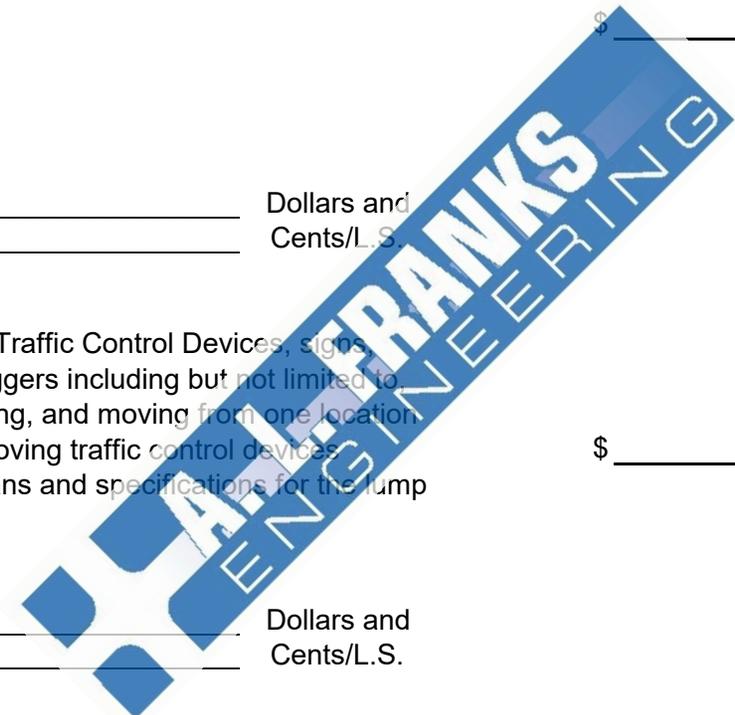

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
27	1	L.S.	Contractor shall perform erosion control measures as directed by the engineer and required by the SWPPP for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
28	1	L.S.	Testing Allowance (by Third-Party Laboratory) as Required by the Engineer for soil and material testing per plans and specifications for the lump sum price of (Invoices shall be submitted to be paid)	\$ <u>5,000</u>	\$ <u>5,000</u>
			Five Thousand Dollars & zero cents Dollars and _____ Cents/L.S.		
TOTAL BASE BID OF ITEMS 1-28				\$ _____	

BID PROPOSAL CONTINUED

NOTES:

- 1. Submission of the completed Bid Proposal is considered evidence to the Owner that the Contractor fully and clearly understands the complete scope of work and all actions and materials required to complete the work.**
- 2. Items required but not specifically called out in the Bid Proposal shall be included in other items.**
- 3. Time required to complete the base bid work shall be 180 calender days.**

