


**CITY OF MAGNOLIA, ARKANSAS  
COLUMBIA STREET DETENTION BASIN**


**BID PROPOSAL**

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of  _____ Dollars and _____ Cents/L.S	\$ _____	\$ _____
2	4.18	AC	Clearing, grubbing, removal and disposal of existing site features within the project boundary including but not limited to culverts, concrete pavement, concrete structures, manholes, sewer mains debris of various types, brush And any other existing site features encountered within the project boundary for the unit price of  _____ Dollars and _____ Cents/AC	\$ _____	\$ _____

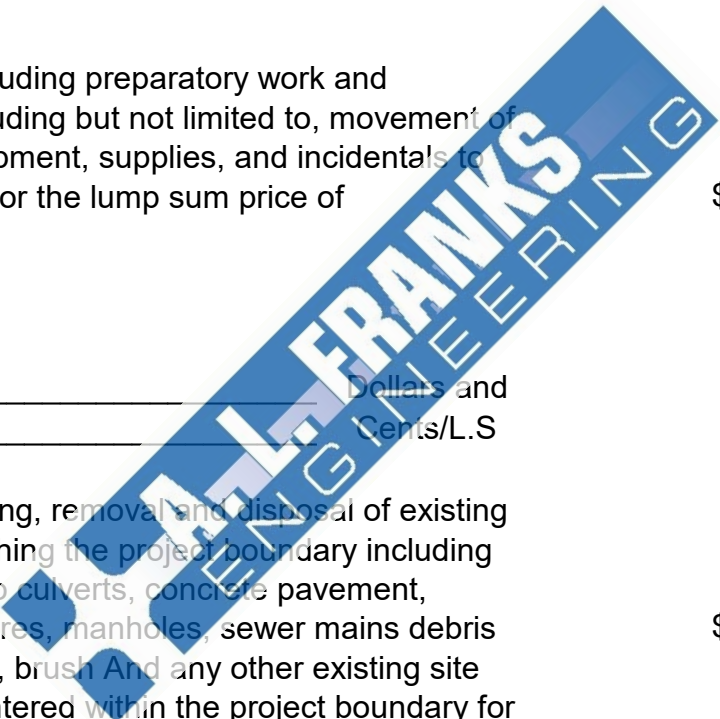


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1	L.S.	Demolition and removal of existing water well and all associated appurtenances following all applicable ADEQ and ADH guidelines for the removal and abandonment of an private water well for the lump sum price of  _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
4	17400	C.Y.	Perform unclassified grading, excavation and removal of existing material, including removal and disposal of existing materials as necessary per the plans for the unit price of  _____ Dollars and _____ Cents/C.Y.	\$ _____	\$ _____

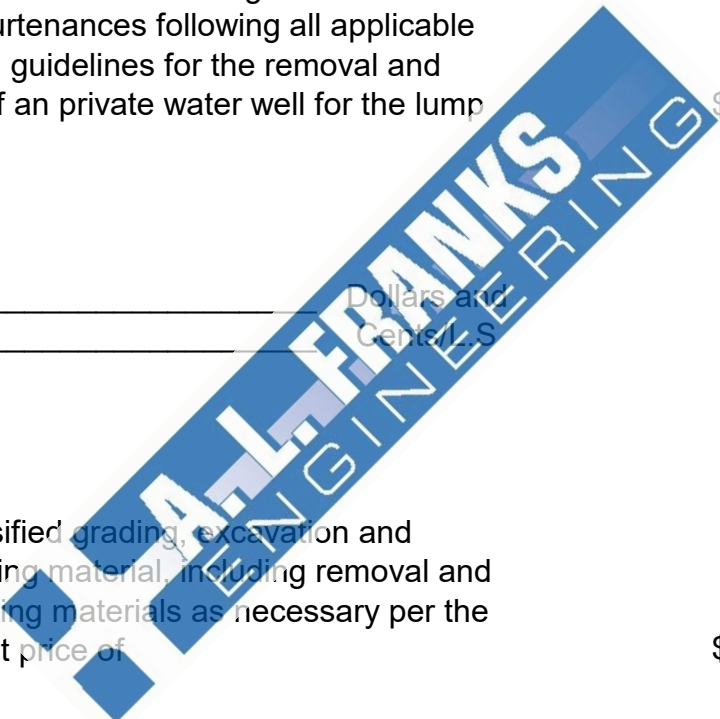

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	800	C.Y.	Provide and install select fill including all labor, hauling, materials, compaction, and incidentals required as needed and described in the plans and specifications for the unit price of  _____ Dollars and _____ Cents/C.Y.	\$ _____	\$ _____
6	25	C.Y.	Provide and install rock rip-rap (12") slope stabilization including the installation of geotextile fabric as required by the plans and specifications at the locations as shown in the plans for the unit price of  _____ Dollars and _____ Cents/C.Y.	\$ _____	\$ _____

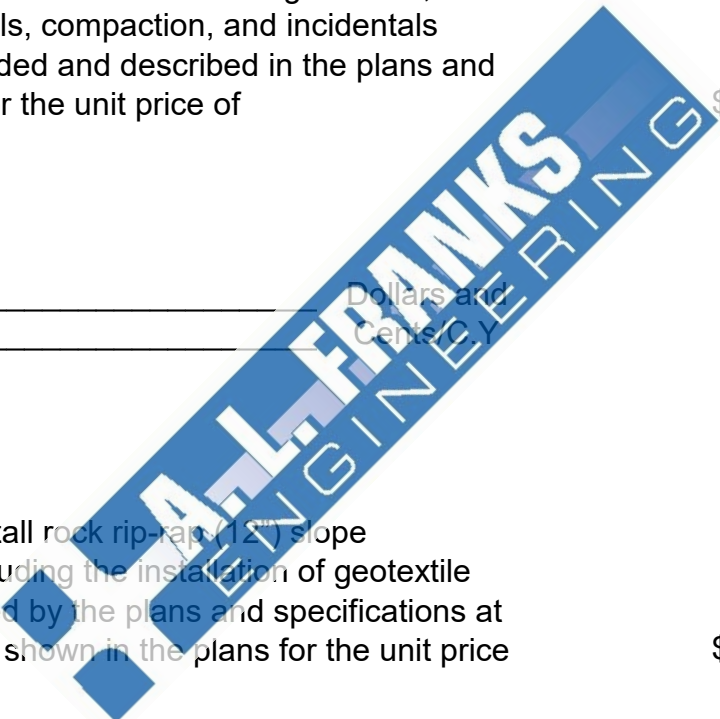

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	84	S.Y.	Provide and install concrete pilot channel including materials, joints, sealant, forming, labor, reinforcing and all other incidental items required for the unit price of  _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
8	94	S.Y.	Provide and install concrete overflow structure including materials, joints, sealant, forming, labor, reinforcing and all other incidental items required for the unit price of  _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	1	L.S.	Provide and install concrete basin outfall structure including materials, joints, sealant, forming, labor, reinforcing and all other incidental items required for the lump sum price of  _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
10	102	L.F.	Provide and install 18" HDPE storm drain on grade including mitered end section, connection to basin outfall structure, all bedding materials, and backfill as shown in the plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	4.18	AC	Provide and install hydroseeding at all disturbed areas within the project boundary as necessary to establish permanent vegetation in accordance with ARDOT seeding and fertilizer requirements for site soil type and season for the unit price of  _____ Dollars and _____ Cents/AC	\$ _____	\$ _____
12	1	L.S.	Provide and install erosion control measures as shown in the stormwater pollution prevention plan including silt fencing, rock berm, faircloth skimmer, seeding, construction entrance and other controls as necessary to limit erosion throughout the project and establish a minimum of 70% permanent vegetation for the lump sum price of  _____ Dollars and _____ Cents/L.S	\$ _____	\$ _____

P-7  
BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	5	S.Y.	Provide and install sidewalk repair associated with the removal of existing sewer manhole including materials, joints, sealant, forming, labor, reinforcing and all other incidental items required for the unit price of  _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
14	726	L.F.	Provide and install 8" SDR-26 gravity sewer main by open cut including bedding, tracer wire, all materials, labor and equipment as required in accordance with the plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

P-8  
BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
15	3	EA	Provide and install 4-ft diameter concrete manhole with cast iron ring and cover including all labor, material and equipment for the installation as shown in the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
16	1	L.S.	Provide and install trench protection as required in accordance with the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S		



P-9  
BID PROPOSAL CONTINUED

TOTAL OF ALL ITEMS

\_\_\_\_\_  
\$ \_\_\_\_\_

**NOTES**

Contractor shall submit bids and hold price for a period of no more than 60 days from the bid opening. All work shall be done in accordance with ADEQ SWPPP Permit Requirements as provided in the specifications.

Items that are subsidiary to performing the work shall include all labor, equipment, and materials shall be supplied by the contractor. Existing utilities and improvements shall be protected during construction and contractor shall coordinate with City of Magnolia Utility Department for connections to existing sewer main. Protection measures shall be approved by the engineer prior to construction.

Haul routes approved designated by the city shall be restored to original conditions upon completion of the work. This area is not included in seeding / revegetation and shall be considered subsidiary to the work.

