


Glenwood, Arkansas
ADEM - Drainage Improvements


BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Mobilization of contractor as required to provide equipment, labor, and all incidental items including bonds, insurance, etc. as required to perform the drainage improvements for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
2	1	L.S.	Furnish equipment and labor to remove all the existing culverts, asphalt, and any additional excavation needed to install the new box culverts at both locations as shown per the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

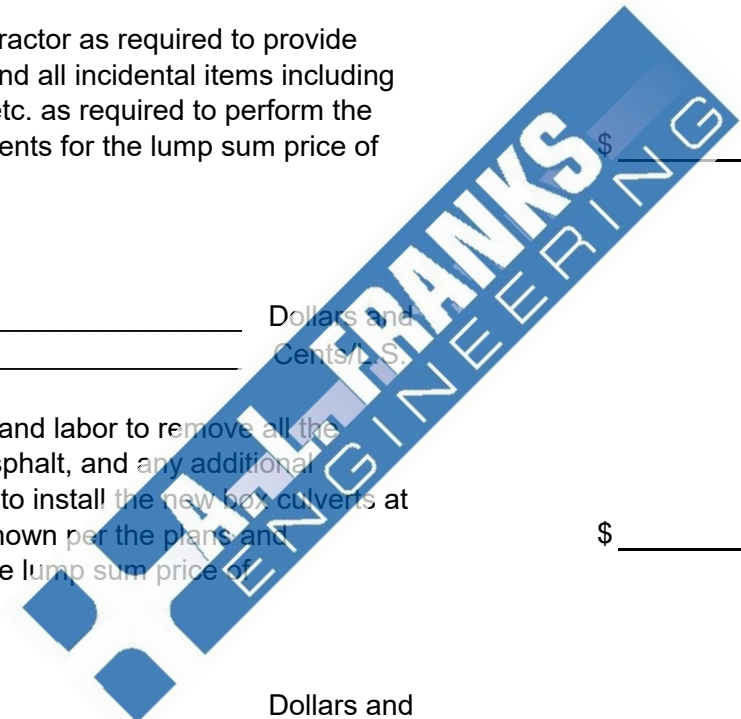


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1	L.S.	Furnish and Install all equipment, material and labor to install 48" box culverts, subgrade, wingwalls, etc. as shown in the plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
4	1	L.S.	Furnish and Install all equipment, material and labor to install 36" box culverts, subgrade, wingwalls, etc. as shown in the plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

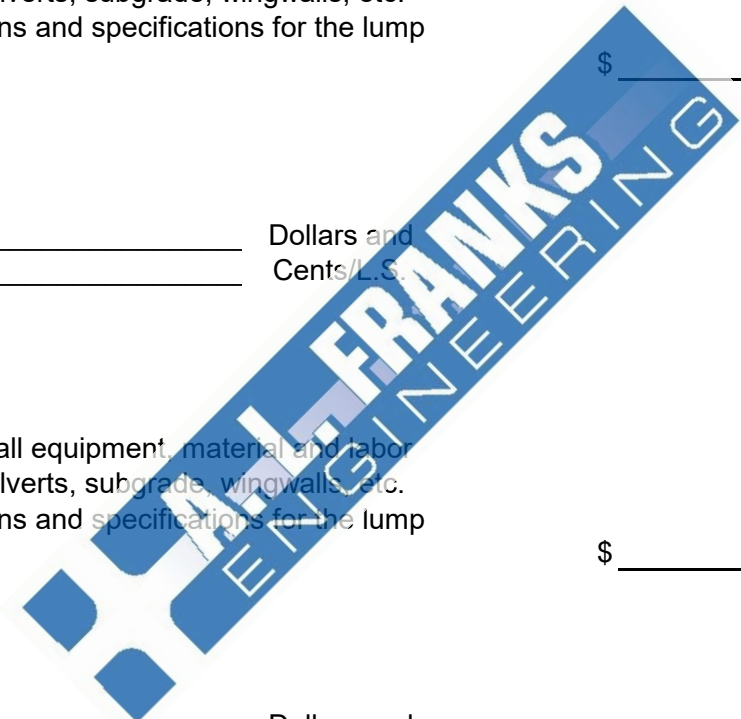


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	1,650	S.F.	Furnish and install ACHM Surface Mix (3.5" avg. thickness) including tack coat, 10" Class 7, sawcutting, handwork, compaction and all incidentals required for complete installation as shown in the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.F.	\$ _____	\$ _____
6	7,200	S.F.	Furnish and install all equipment, material, and labor to install 12"-18" Rip Rap drainage (24" Min. Depth) 35 lb. min. on filter fabric including any grading, clearing, or suitable backfill per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.F.	\$ _____	\$ _____

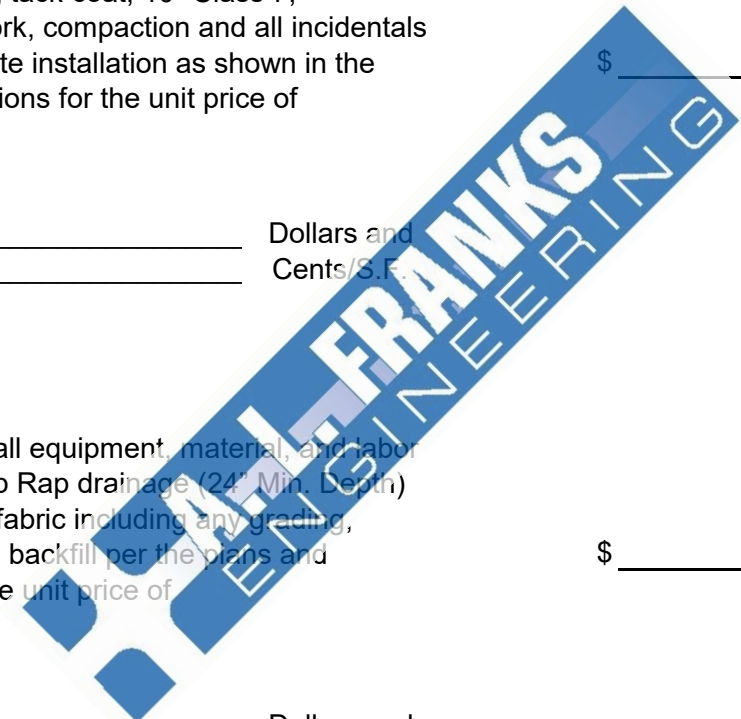

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	1	L.S.	Furnish and Install all equipment, material, and labor to repair the concrete spalling on the underside of the bridge structure as shown in the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ _____ Dollars and Cents/L.S.		
8	1	L.S.	Maintenance of Traffic per the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ _____ Dollars and Cents/L.S.		

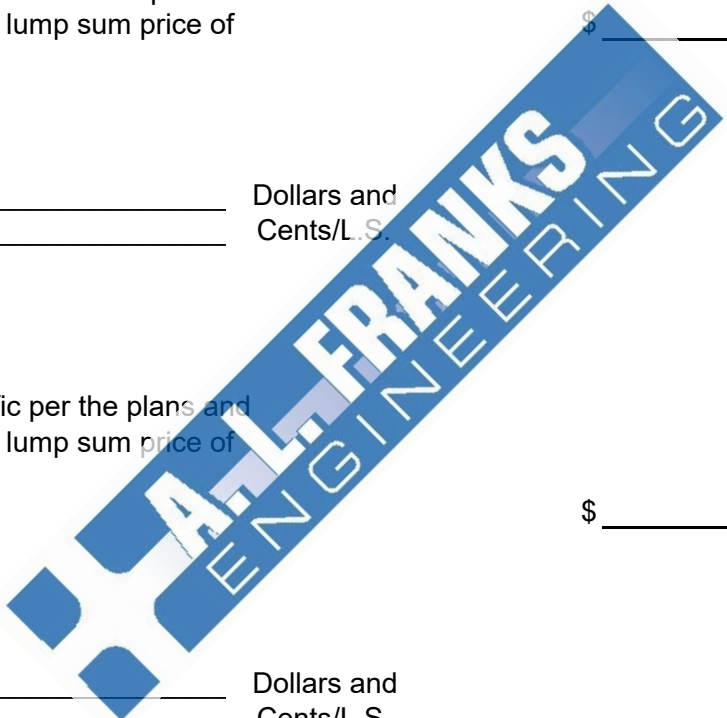

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	1	L.S.	Contractor shall perform erosion control measures as directed by the engineer and required by the SWPPP per the plans and specifications for the lump sum price of	\$ _____	\$ _____

_____ Dollars and
 _____ Cents/L.S.

TOTAL BASE BID OF ITEMS 1-9

=====

\$ _____

