


**CITY OF STUTT GART, ARKANSAS
PORTER STREET DRAINAGE IMPROVEMENTS**

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	1	L.S.	Perform removal and disposal of various size and material stormdrain culverts for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

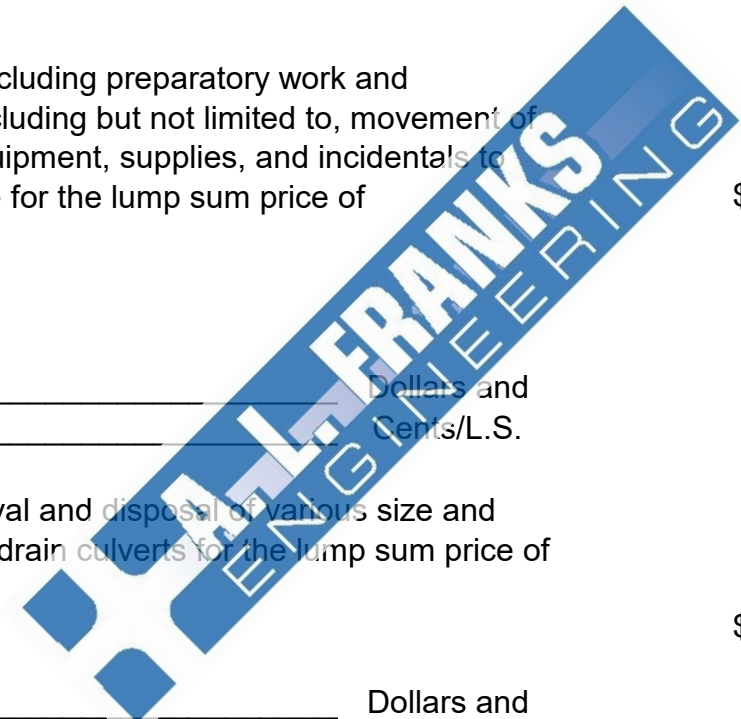

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	5	E.A.	Perform removal and disposal of existing drainage inlets for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
4	97.8	S.Y.	Perform removal and replacement of existing gravel drive surface associated with the installation of driveway culvert including all grading and compaction for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
5	463	L.F.	Perform removal of existing asphalt surface to neat lines. Includes saw cutting, removal and disposal of excavated material for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

BID PROPOSAL CONTINUED


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
6	21.4	S.Y.	Perform removal of existing concrete surface to neat lines. Includes saw cutting, removal and disposal of excavated material for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.Y.		
7	28	L.F.	Perform removal and disposal of existing concrete curb and gutter to neat lines for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
8	1	E.A.	Provide and install concrete plug for existing culvert including but not limited to excavation, materials, labor and grading necessary per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/E.A.		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	600	C.Y.	Perform unclassified excavation and removal of existing material, including removal and disposal of existing materials as necessary per the plans for the unit price of _____ Dollars and _____ Cents/C.Y.	\$ _____	\$ _____
10	100	C.Y.	Provide and install compacted embankment including all labor, hauling, materials, compaction and incidentals required as needed and described in the plans and specifications for the unit price of _____ Dollars and _____ Cents/C.Y.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
11	1	E.A.	Furnish and intall 2'x2' concrete junction box w/grate inlet per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
12	3	E.A.	Furnish and intall 3'x3' concrete junction box w/grate inlet per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
13	3	E.A.	Furnish and intall 3'x5' concrete junction box w/grate inlet per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____

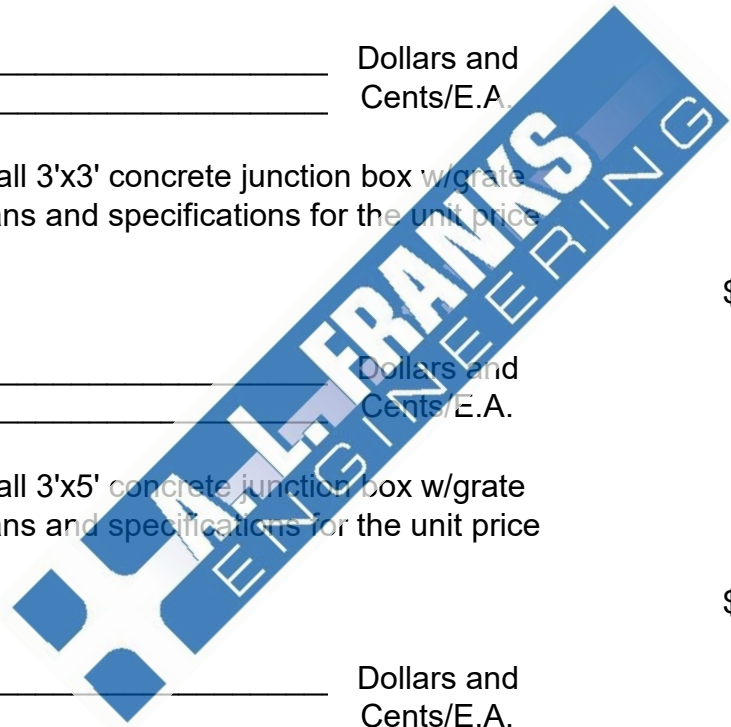


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
14	1	E.A.	Furnish and intall 5'x5' concrete junction box w/grate inlet per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
15	1	E.A.	Furnish and intall concrete yard inlet per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
16	1	E.A.	Furnish and intall 12" Tideflex check valve and associated pipe including materials, labor and equipment necessary to connect to concrete junction box per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
17	2	E.A.	Provide and install 8' curb inlet per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
18	32	L.F.	Furnish and intall 12" RCP per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
19	138	L.F.	Furnish and intall 18" RCP per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

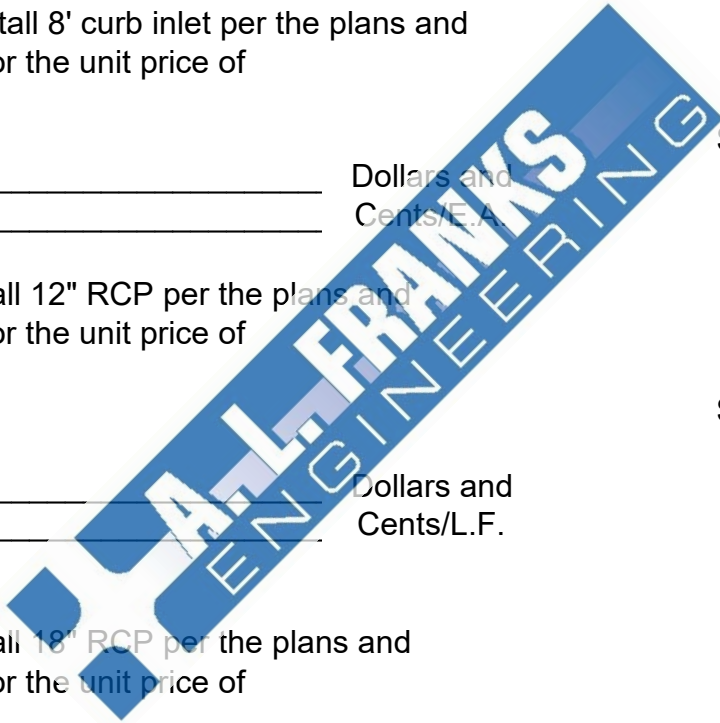

BID PROPOSAL CONTINUED


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
20	260	L.F.	Furnish and intall 24" RCP per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
21	468	L.F.	Furnish and intall 36" RCP per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
22	20.9	S.Y.	Provide and install 6" thick concrete driveway including all labor and equipment, materials and grading per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
23	16	L.F.	Provide and install concrete curb and gutter as required in accordance with the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
24	5	S.Y.	Provide and install concrete sidewalk flatwork 4" thick per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
25	463	L.F.	Provide and install asphalt street repair including all labor, materials, grading and compaction needed for the installation of asphalt street repair for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
26	0.5	AC	Provide and install hydroseeding at all disturbed areas within the Porter Street project area as necessary to establish permanent vegetation in accordance with ARDOT seeding and fertilizer requirements for site soil type and season for the unit price of _____ Dollars and _____ Cents/AC	\$ _____	\$ _____
27	1	L.S.	Install & maintain erosion control measures as shown on the Erosion Control Plan including silt fencing, inlet protection, rock dam, seeding, and other controls as necessary to limit erosion throughout the project and establish a minimum of 70% permanent vegetation for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

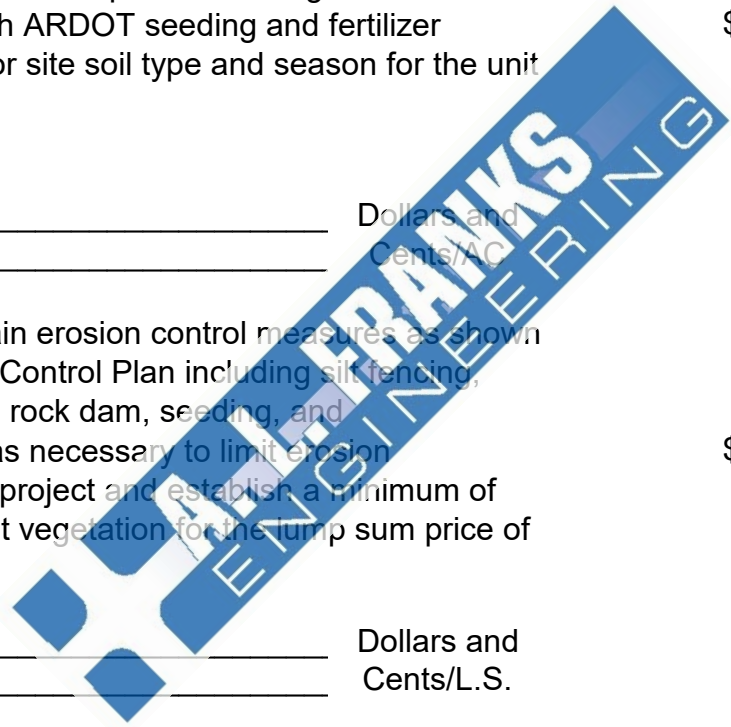


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
28	1	L.S.	Provide and install trench protection as required in accordance with the plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
29	1	L.S.	Furnish and install traffic control devices, including but not limited to, installing, maintaining, and removing traffic control devices according to the plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
TOTAL OF ITEMS 1-29				\$ _____	

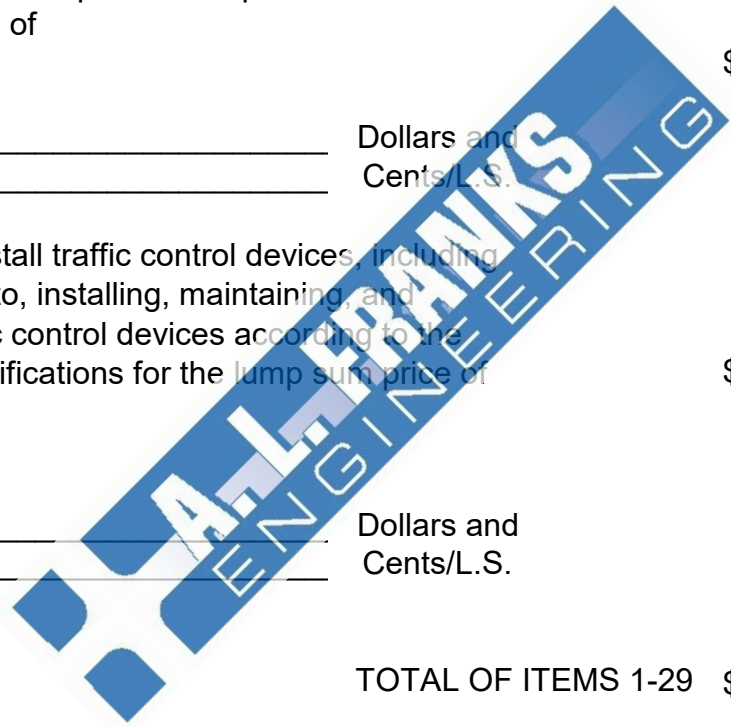


BID PROPOSAL CONTINUED
ALTERNATE BID ITEM #1

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	32	L.F.	<p>Item #18: REPLACE: Furnish and intall 12" RCP per the plans and specifications for the unit price of</p> <p>WITH: Furnish and intall 12" HDPE per the plans and specifications for the unit price of</p> <p>_____ Dollars and _____ Cents/L.F.</p>	\$ _____	\$ _____
2	138	L.F.	<p>Item #19: REPLACE:Furnish and intall 18" RCP per the plans and specifications for the unit price of</p> <p>WITH: Furnish and intall 18" HDPE per the plans and specifications for the unit price of</p> <p>_____ Dollars and _____ Cents/L.F.</p>	\$ _____	\$ _____

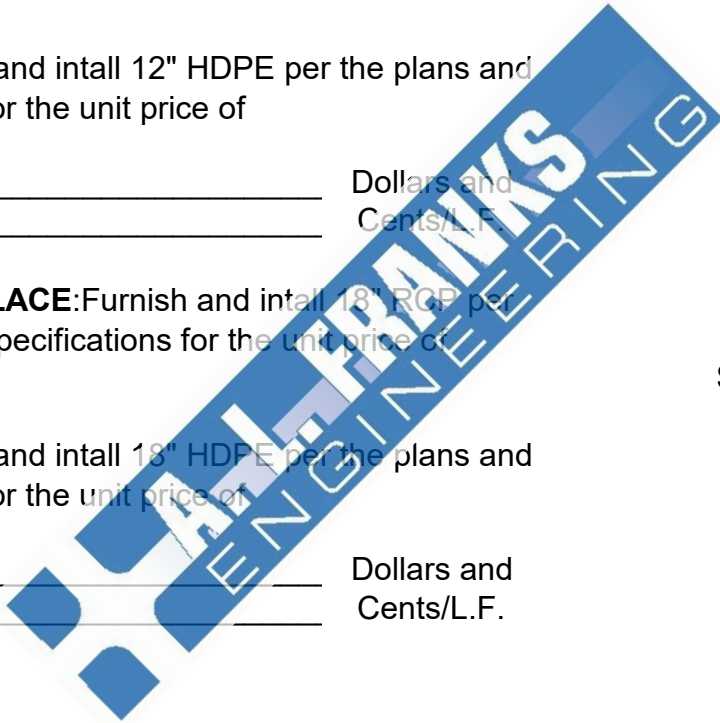

BID PROPOSAL CONTINUED
ALTERNATE BID ITEM #1 CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	260	L.F.	Item #20: REPLACE: Furnish and intall 24" RCP per the plans and specifications for the unit price of WITH: Furnish and intall 24" HDPE per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
4	468	L.F.	Item #21: REPLACE: Furnish and intall 36" RCP per the plans and specifications for the unit price of WITH: Furnish and intall 36" HDPE per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
TOTAL OF ALTERNATE BID ITEM #1				\$ _____	
TOTAL BASE BID LESS ITEMS (18-21) & ADDED ALTERNATE BID ITEM #1				\$ _____	

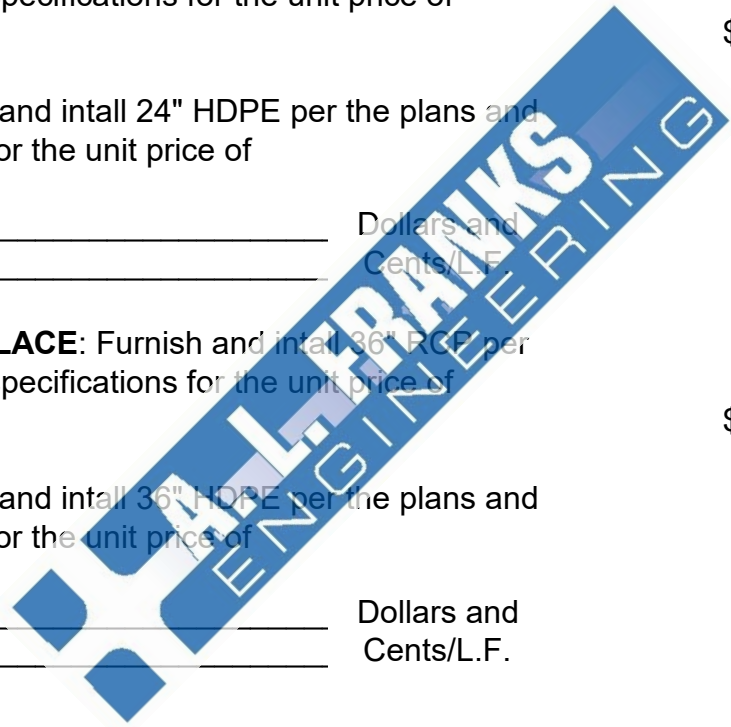

BID PROPOSAL CONTINUED

NOTES: Contractor shall submit bids and hold price for a period of no more than 60 days from the bid opening. All work shall be done in accordance with ADEQ requirements and permits as provided in the specifications.

Unit prices and total prices must be specified in both words and figures, e.g., \$100.00, One Hundred Dollars and No Cents. In case of a discrepancy, the amount in words will govern.

Items that are subsidiary to performing the work shall include all labor, equipment, and materials shall be supplied by the contractor. Existing utilities and improvements shall be protected during construction and contractor shall coordinate with City of Stuttgart Utility Department for existing utilities encountered. Protection measures shall be approved by the engineer prior to construction.

Haul routes approved designated by the city shall be restored to original conditions upon completion of the work. This area is not included in seeding / revegetation and shall be considered subsidiary to the work.

Owner reserves the right to select either Base Bid or Base Bid less Base Bid Items 18-21 with Alternate Bid Items 1-4 added and will notify contractor at the time of awarding the contract.

Time required to complete base bid work or alternate bid work shall be 90 calendar days. Bidder further agrees to pay as liquidated damages, the sum of \$500.00 for each consecutive calendar day thereafter.