

NORTH HOWARD COUNTY, ARKANSAS


10" WATER MAIN REPLACEMENT

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	7563	L.S.	Furnish and Install 10" C-900 Water Main and Fittings including trench excavation, laying, bedding, blocking and backfilling under Type 2 laying conditions per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	2	EA	Furnish and Install 10" M.J. Gate Valve including valve box and blocking per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	2	EA.	Tie-in to 10" Existing Water Main per plans and specifications for the unit price of	_____ Dollars and Cents/EA	\$ _____
4	75	L.F.	Open Cut and Repair Gravel Driveway per plans and specifications for the unit price of	_____ Dollars and Cents/L.F	\$ _____

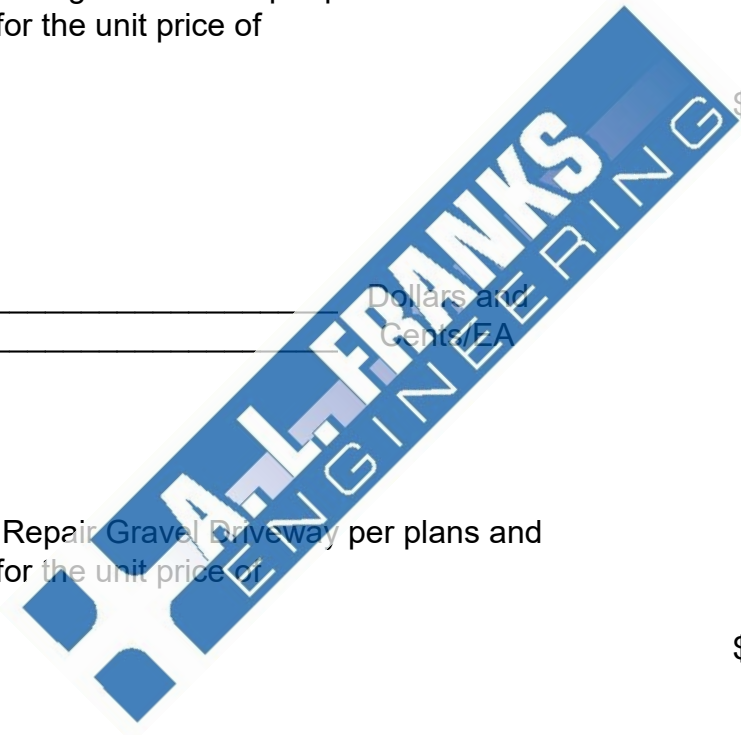


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	90	L.F.	Open Cut and Repair Gravel Street per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
6	3	EA	Reconnect Meter Set (Short Side Service) per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	2	EA	Reconnect Meter Set (Long Side Service) per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
8	1	L.S.	Trench Safety per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

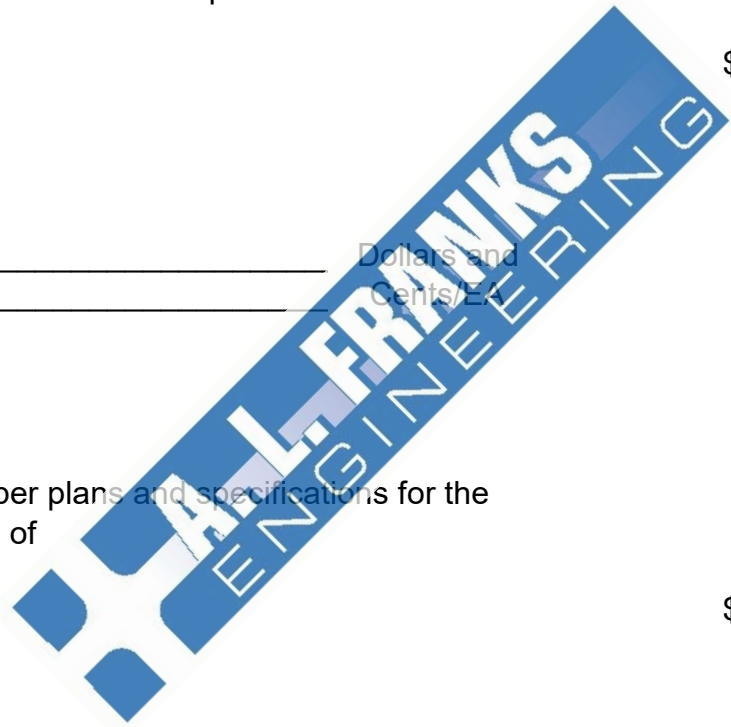


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	1	L.S.	Furnish all labor and install equipment for testing and sterilization of treated mains and appurtenances per plans and specifications for the lump sum of.	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.	_____	_____
			DEDUCTIVE ALTERNATE	\$ _____	
1	1000	L.S.	Deduct from Item 1: Furnish and install 10" C-900 Water Main and Fittings including trench excavation, laying, bedding, blocking and backfilling under Type 2 laying conditions per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
2	25	L.F.	Deduct from Item 4: Open Cut and Repair Gravel Driveway per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
3	1	EA	Deduct from Item 6: Reconnect Meter Set (Short Side Service) per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

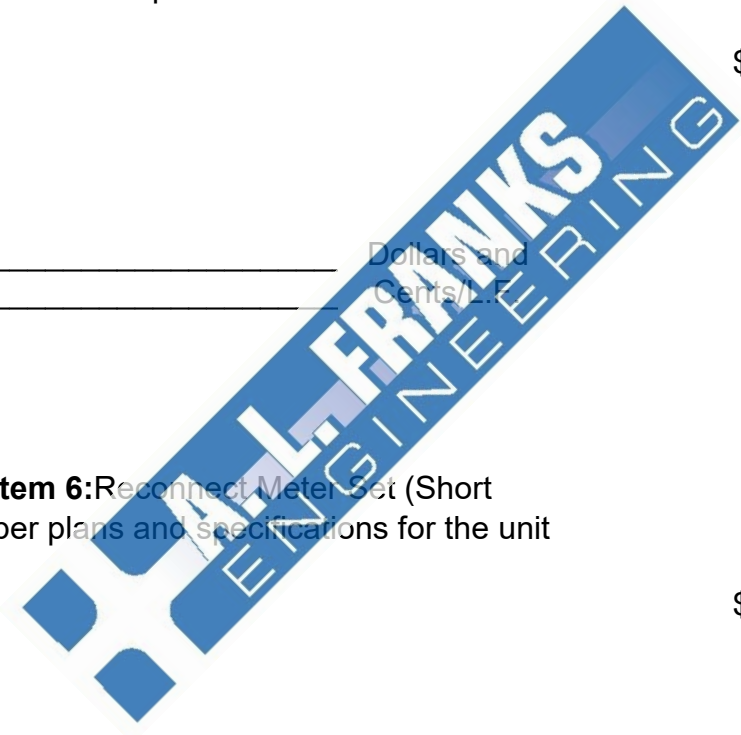

TOTAL DEDUCTIVE ALTERNATE \$ _____

TOTAL BASE BID LESS DEDUCTIVE ALTERNATE \$ _____

- NOTES**
- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
 - 2) Time required to complete base bid work shall be 120 calendar days.
 - 3) Contractor is solely responsible for the complete abandonment of all existing mains unless otherwise noted.

