


**CITY OF NORMAN, ARKANSAS**  
**HUDDLESTON CREEK SEWER REPLACEMENT**

**BID PROPOSAL**

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of  _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	7	E.A.	Demolition and removal of existing manholes and all associated appurtenances following all applicable ADEQ and ADH guidelines for the removal of manholes for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

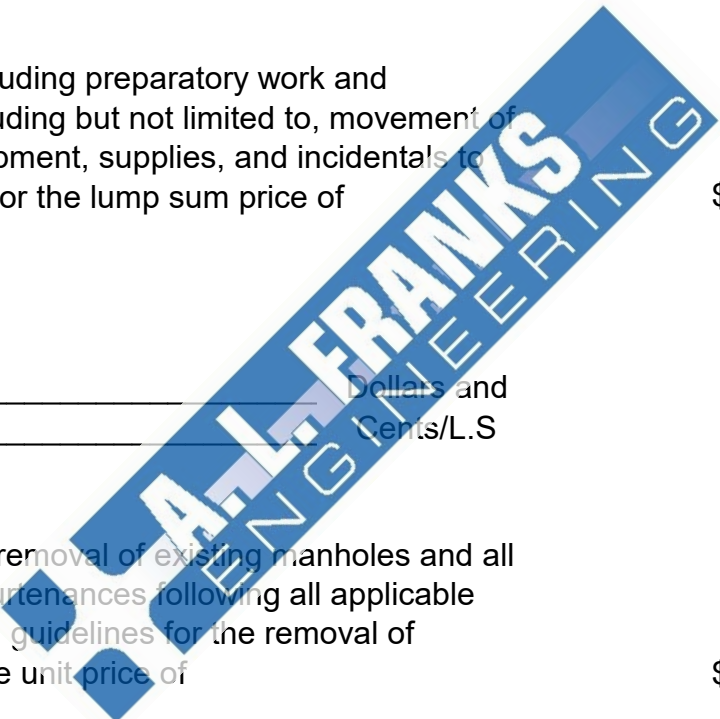

BID PROPOSAL CONTINUED


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1158	L.F.	Demolition and removal of existing sewer main and all associated appurtenances following all applicable ADEQ and ADH guidelines for the removal of sewer main for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
4	339	L.F.	Abandonment and filling sewer main with flowable fill following all applicable ADEQ and ADH guidelines for the abandonment of sewer mains for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	20	L.F.	Perform removal and replacement of wooden boundary fence per the plans for the unit price of  _____ Dollars and _____ Cents/L.F	\$ _____	\$ _____
6	1306	L.F.	Provide and install 8" SDR-26 gravity sewer main by open cut including, bedding, tracer wire, all materials, labor and equipment as required in accordance with the plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F	\$ _____	\$ _____
7	200	L.F.	Provide and install 8" SDR-21 gravity sewer main by bore including all materials, labor and equipment as required in accordance with the plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
8	60	L.F.	Provide and install 8" DIP (Aerial Crossing) gravity sewer main including all materials, labor and equipment as required in accordance with the plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
9	20	C.Y.	Provide and install gravel embedment when unfavorable soil conditions are encountered as approved by Engineer including all labor, hauling, materials, compaction, and incidentals required as needed and described in the plans and specifications for the unit price of  _____ Dollars and _____ Cents/C.Y.	\$ _____	\$ _____

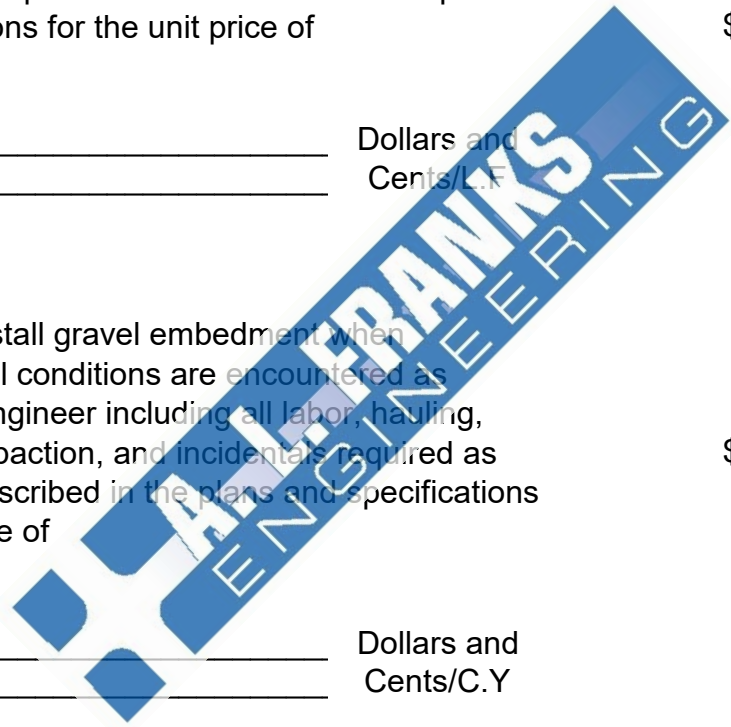


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT	TOTAL
10	7	EA	Provide and install 4-ft diameter concrete manhole with cast iron ring and cover including all labor, material and equipment for the installation as shown in the plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
11	1	L.S.	Provide and install trench protection as required in accordance with the plans and specifications for the lump sum price of  _____ Dollars and _____ Cents/L.S	\$ _____	\$ _____
12	1	L.S.	Provide and install erosion control measures as shown on the erosion control plan including silt fencing, rock berm, faircloth skimmer, seeding, construction entrance and other controls as necessary to limit erosion throughout the project and establish a minimum of 70% permanent vegetation for the lump sum price of  _____ Dollars and _____ Cents/L.S	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	0.70	AC	Provide and install hydroseeding at all disturbed areas within the project boundary as necessary to establish permanent vegetation in accordance with ARDOT seeding and fertilizer requirements for site soil type and season for the unit price of  _____ Dollars and _____ Cents/AC	\$ _____	\$ _____
14	1	L.S.	Provide all equipment and material for Testing Sewer Mains and Manholes per plans and specifications for the project allowance of  Two thousand _____ Dollars and zero _____ Cents/LS	\$ <u>2000</u>	\$ <u>2000</u>
<b>TOTAL OF ALL ITEMS (1-14)</b>				\$ _____	

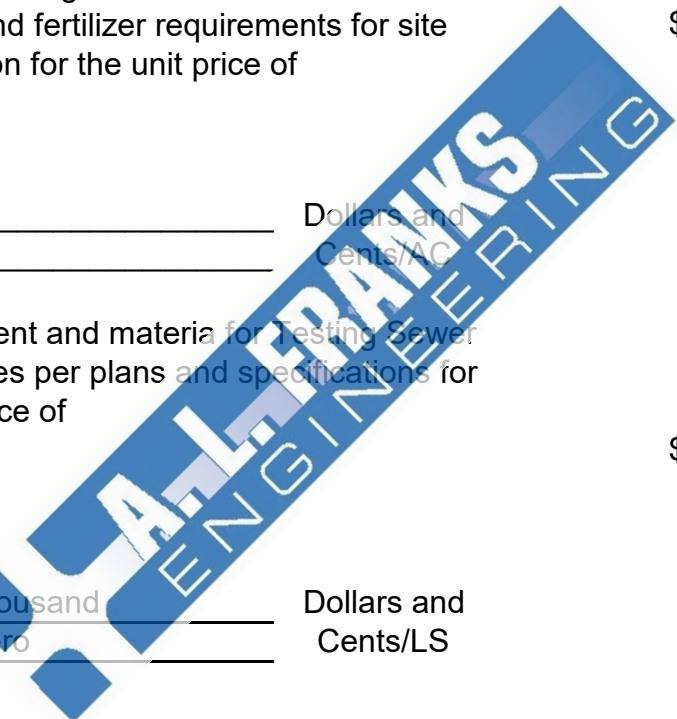

BID PROPOSAL CONTINUED

**NOTES**

Contractor shall submit bids and hold price for a period of no more than 60 days from the bid opening. All work shall be done in accordance with ADEQ, ADH & ARDOT requirements.

Items that are subsidiary to performing the work shall include all labor, equipment, and materials shall be supplied by the contractor. Existing utilities and improvements shall be protected during construction and contractor shall coordinate with City of Norman Utility Department for connections to existing sewer main. Protection measures shall be approved by the engineer prior to construction.


Haul routes approved designated by the city shall be restored to original conditions upon completion of the work. This area is not included in seeding / revegetation and shall be considered subsidiary to the work.

ITEM	QTY	UNIT	DEDUCTIVE ALTERNATE #1 DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	3	E.A.	Item #2: Reduce/Replace Demolition and removal of existing manholes and all associated appurtenances following all applicable ADEQ and ADH guidelines for the removal of manholes for the unit price of	\$ _____	\$ _____
_____ Dollars and				_____	
_____ Cents/E.A.				_____	

BID PROPOSAL CONTINUED

**DEDUCTIVE ALERNATE #1 CONTINUED  
DESCRIPTION**

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
2	403	L.F.	Item #3: Reduce/Replace Demolition and removal of existing sewer main and all associated appurtenances following all applicable ADEQ and ADH guidelines for the removal of sewer main for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
3	6	E.A.	Item #10: Reduce/Replace Provide and install 4-ft diameter concrete manhole with cast iron ring and cover including all labor, material and equipment for the installation as shown in the plans and specifications for the unit price of  _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____

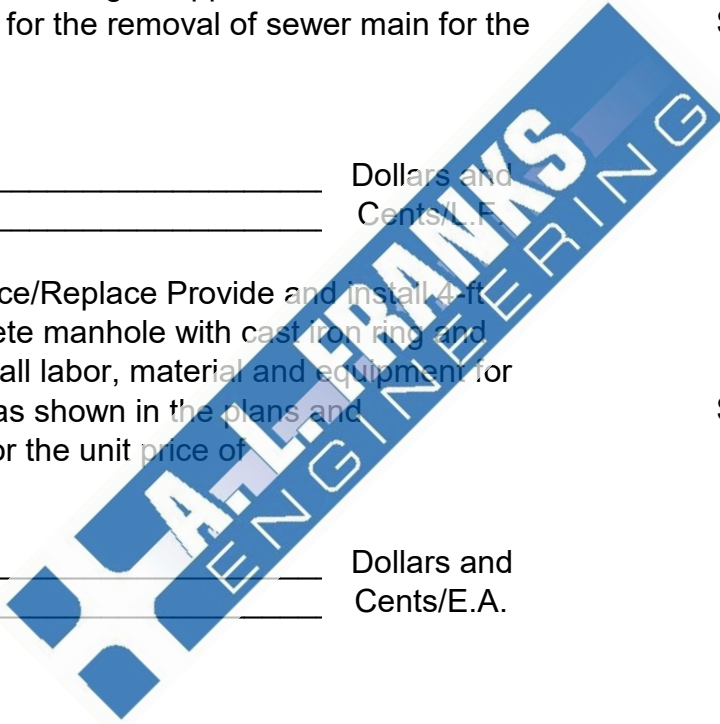



BID PROPOSAL CONTINUED

**DEDUCTIVE ALERNATE #1 CONTINUED  
DESCRIPTION**

<b>ITEM</b>	<b>QTY</b>	<b>UNIT</b>	<b>DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>TOTAL PRICE</b>
4	3	E.A.	Add Item: Abandon Existing Manholes following all applicable ADEQ and ADH guidelines for the removal of sewer main for the unit price of  _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
5	1	L.S.	Add Item: Abandon & plug existing sewer mains following all applicable ADEQ and ADH guidelines for the removal of sewer main for the lump sum price of  _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
<b>TOTAL DEDUCTIVE ALERNATE #1</b>				\$ _____	
<b>TOTAL BASE BID LESS ITEMS 2, 3 &amp; 10 AND ADDED ALERNATE #1</b>				\$ _____	

