

**CITY OF EL DORADO, ARKANSAS
BOB WATSON DR. SIDEWALK IMPROVEMENTS
BID PROPOSAL**

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
1.	1 L.S.	Removal and disposal including, but not limited to concrete sidewalks, curbs, gutters, asphalt sections, trees, and brush including all necessary saw cutting as shown on the plans for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2.	1 L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
3.	1 L.S.	Maintenance of Traffic per the plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

BID PROPOSAL
(Cont'd.)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
4.	2,370 S.Y.	Concrete flatwork 4" thick including any grading, paving sand, reinforcement, Etc. per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
5.	115 S.Y.	Concrete flatwork 6" thick including any grading, Paving sand, reinforcement, etc. per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
6.	2,300 L.F.	6" Concrete curb and Gutter including sawcut line on the Edge of asphalt per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
7.	80 L.F.	Laydown Concrete curb including sawcut line on the Edge of asphalt per the plans and specifications for the unit price of (laydown curb at wheelchair ramps to be included in ramp bid item) _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

BID PROPOSAL
(Cont'd.)


<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
8.	1 L.S.	Furnish all equipment, material, and labor to install 12"-18" Rip Rap drainage (24" Min. Depth) 35 lb. min. on filter fabric including any grading or suitable backfill per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
9.	500 L.F.	Modular concrete Retaining Walls and footings per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
10.	1 EA	Furnish and install wheelchair ramps type 1 including Any transitional ramps, landings, etc. to have a legal Ramp per the plans and specifications for the unit Price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
11.	3 EA	Furnish and install wheelchair ramps type 3 including Any transitional ramps, landings, etc. to have a legal Ramp per the plans and specifications for the unit Price of _____ Dollars and _____ Cents/ EA	\$ _____	\$ _____

BID PROPOSAL
(Cont'd.)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
12.	1 EA	Furnish and install wheelchair ramps type 4 including Any transitional ramps, landings, etc. to have a legal Ramp per the plans and specifications for the unit Price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
13.	5 EA.	Diamond Plate Steel for sidewalk drains to be bolted per the plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
14.	1 L.S.	Furnish all equipment, material, and labor to install Headwall and drainage at Sta. 9+25 around the existing Drainpipe per the plans and specifications for the unit price of (not including handrail & flatwork) _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
15.	1 L.S.	Furnish all equipment, material, and labor to install Headwall and drainage at Sta: 22+35 around the existing Box Culvert per the plans and specifications for the unit price of (not including handrail & flatwork) _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____


BID PROPOSAL
(Cont'd.)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
16.	50 L.F.	Handrail per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
17.	64 S.F.	Furnish and Install Traffic Control Devices, (4 Road Work Signs Total) including but not limited to, installing, maintaining, moving from one location to another and removing traffic control devices according to the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.F.	\$ _____	\$ _____
18.	5 EA.	Re-install street signs using sidewalk penetration detail Per the plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
19.	4 EA.	Solar powered pedestrian crosswalk signs per the plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____

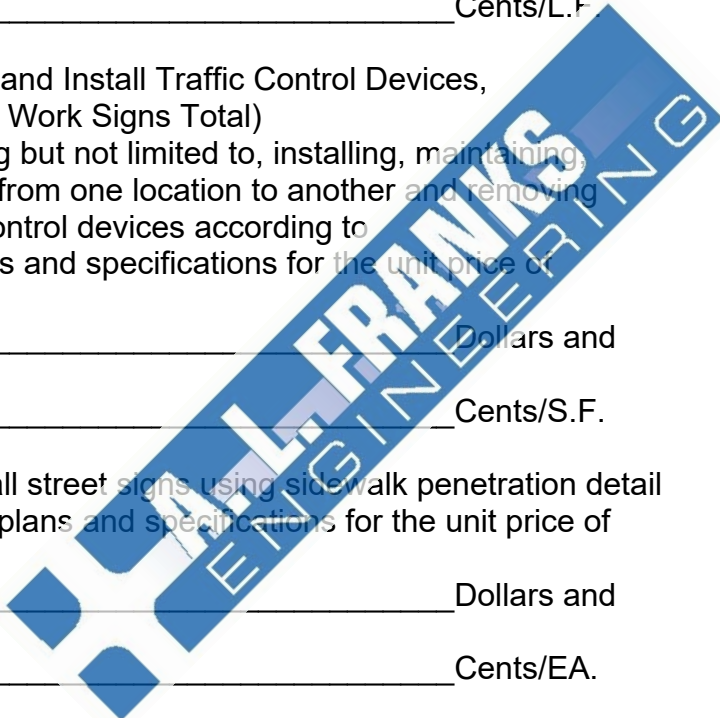

BID PROPOSAL
(Cont'd.)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
20.	2 EA.	Furnish and Install crosswalk striping per the plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
21.	4,460 S.F.	Grade and Seed sidewalk area per the plans and specifications for the unit price of _____ Dollars and _____ Cents/SF.	\$ _____	\$ _____
22.	1 L.S.	Grade and cut/fill as directed by the engineer around the sidewalk area after installation of the sidewalk to achieve 3:1 slope requirements and stabilization per the plans and specifications for the unit price of _____ Dollars and _____ Cents/LS.	\$ _____	\$ _____
23.	39 EA.	Provide and Install antique light post including all necessary bores, electrical wiring, conduit, and base end panel board for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____

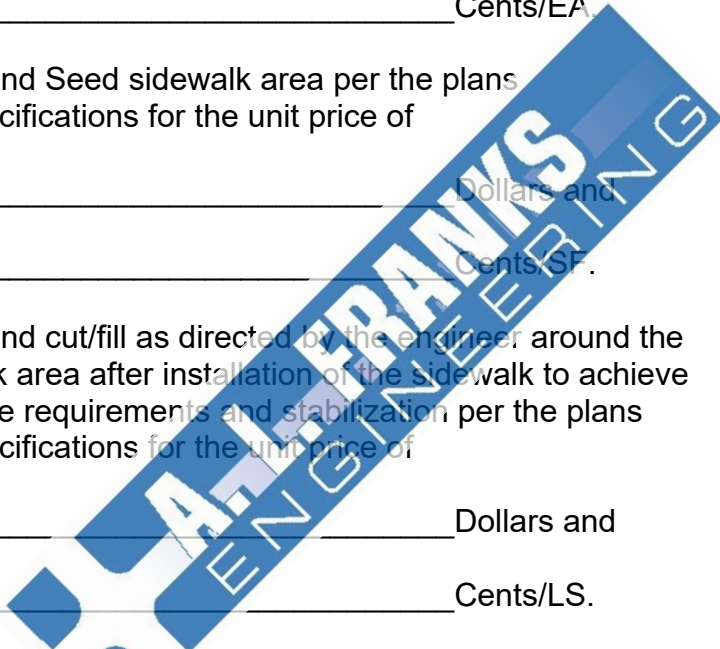

BID PROPOSAL

(Cont'd.)

TOTAL BASE BID

\$ _____

NOTES:

- 1) Submission of the completed Bid Proposal is considered evidence to the Owner that the Contractor fully and clearly understands the complete scope of work and all actions and materials required to complete the work.
- 2) Items required but not specifically called out in the Bid Proposal shall be included in other items.
- 3) Time required to complete base bid work shall be 120 calendar days.

