

SEIVER COUNTY WATER ASSOCIATION


HWY 71 UTILITY RELOCATION

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	60	L.F.	Furnish and Install 3" C900 DR-18 PVC Water Main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
2	100	L.F.	Furnish and Install 4" C900 DR-18 PVC Water Main, Fittings, including trench excavation, laying, bedding, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	23295	L.F.	Furnish and Install 8" C900 DR-18 PVC Water Main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
4	3710	L.F.	Furnish and Install 10" C900 DR-18 PVC Water Main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

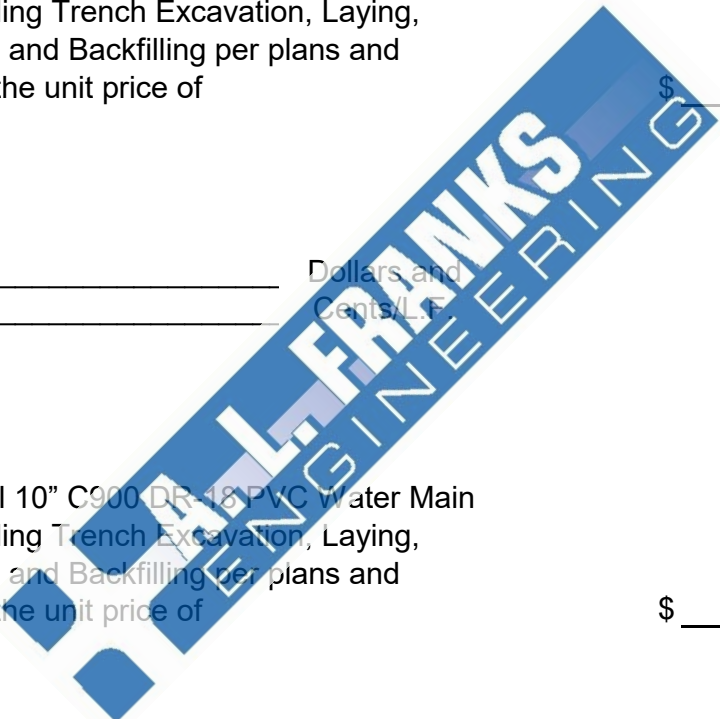

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	160	L.F.	Bore and Encase 3" SDR-21 PVC Water Main Encased in 6"x0.375" steel encasement, and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of	\$ _____ _____ Dollars and Cents/L.F.	\$ _____
6	160	L.F.	Bore and Encase 4" SDR-21 PVC Water Main Encased in 8"x0.375" steel encasement, and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of	\$ _____ _____ Dollars and Cents/L.F.	\$ _____

BID PROPOSAL CONTINUED


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	965	L.F.	Directional Bore 8" C900 DR-18 Certa-lok Water Main per plans and specifications for the unit price of (Directional Bore includes the pipe)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
8	90	L.F.	Directional Bore 10" C900 DR-18 Certa-lok Water Main per plans and specifications for the unit price of (Directional Bore includes the pipe)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	80	L.F.	Furnish and Install 2" SDR-21 PVC Water Main Encased in 4"x0.375" steel encasement, and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
10	100	L.F.	Furnish and Install 4" SDR-21 PVC Water Main Encased in 8"x0.375" steel encasement, and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	7	EA	Furnish and Install 3" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
12	3	EA	Furnish and Install 4" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

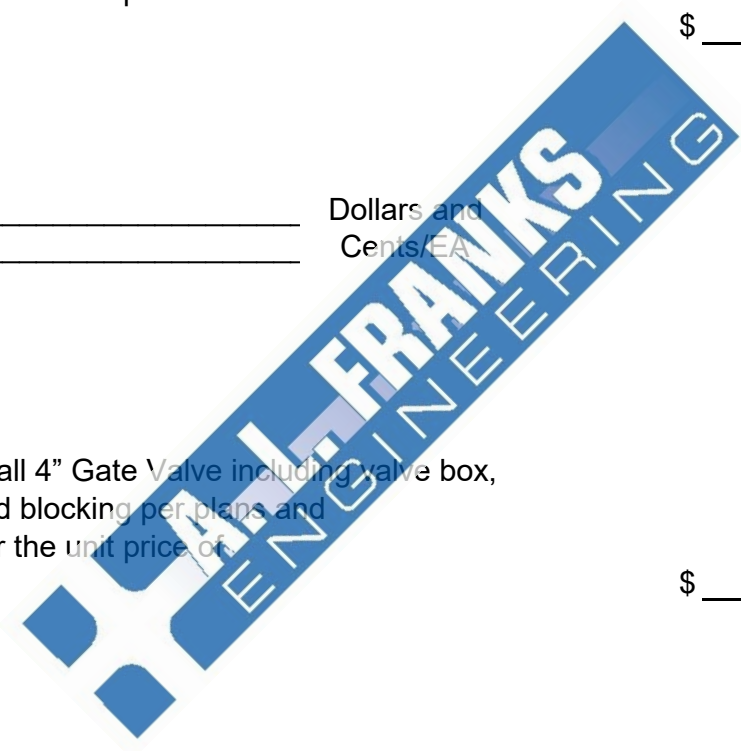


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	1	EA	Furnish and Install 6" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
14	10	EA	Furnish and Install 8" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

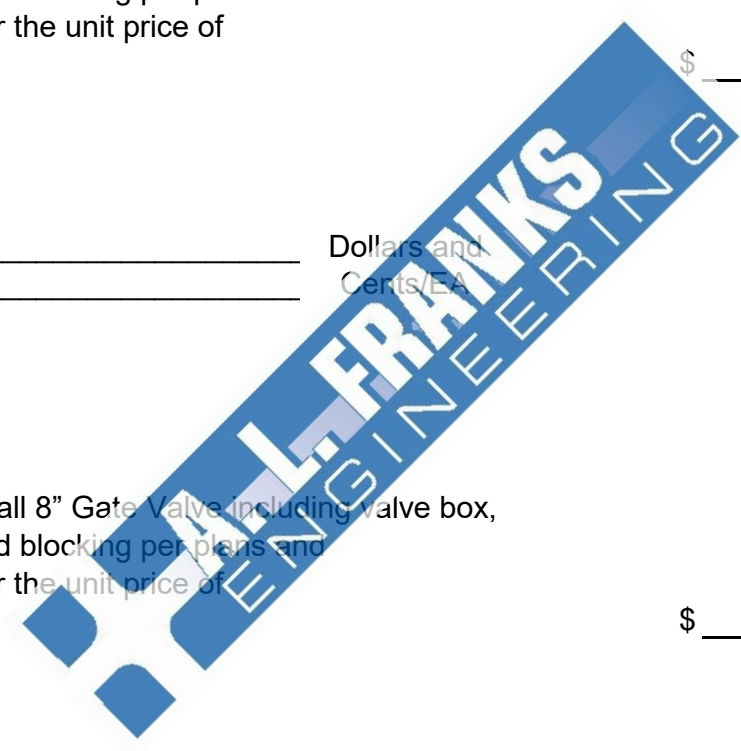


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
15	3	EA	Furnish and Install 10" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
16	10	EA	Furnish and Install 6" Fire Hydrant Assembly including 6" Gate Valve, Blocking and Drain Rock per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

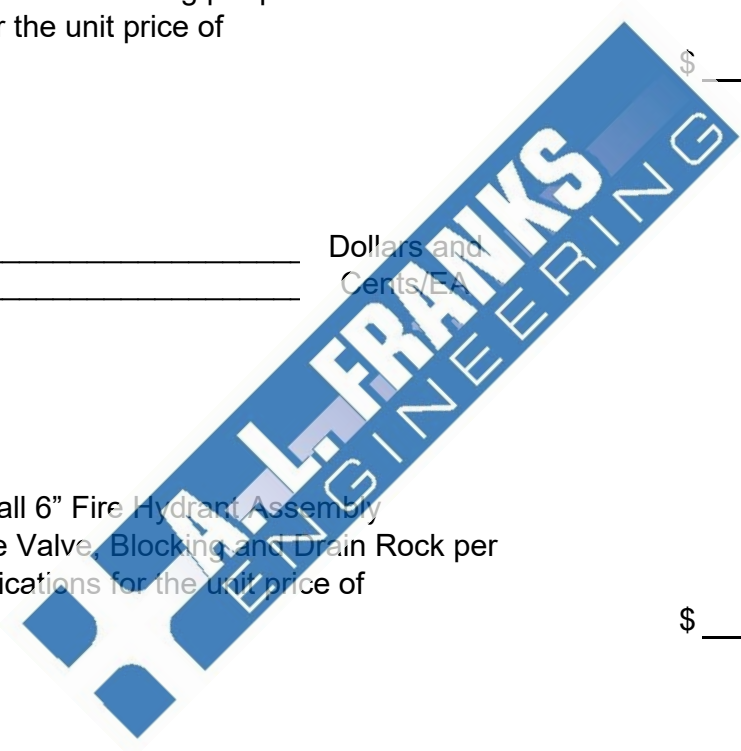


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
17	1	EA	Tie in Prop. 2" PVC to Existing 2" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
18	1	EA	Tie in Prop. 3" PVC to Existing 2" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

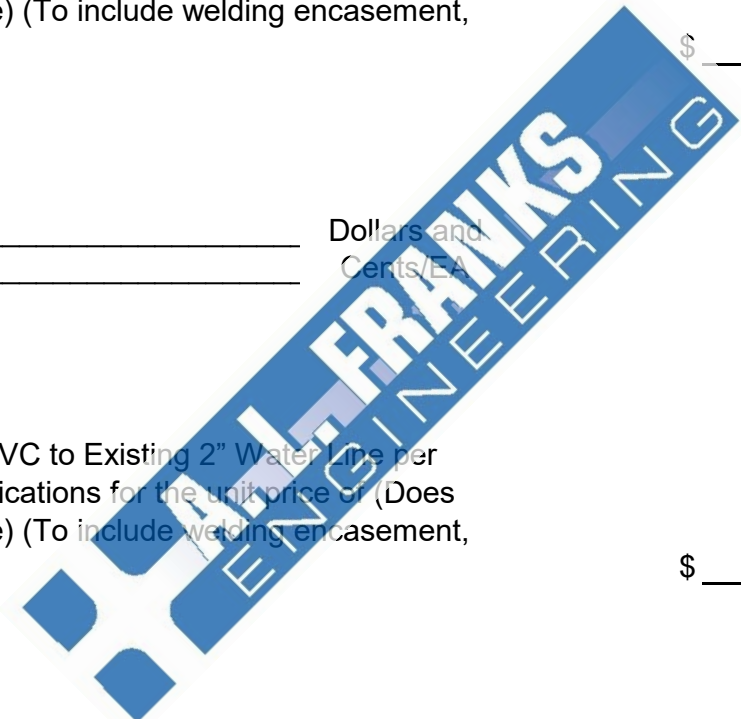


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
19	1	EA	Tie in Prop. 3" PVC to Existing 3" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
20	3	EA	Tie in Prop. 4" PVC to Existing 4" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

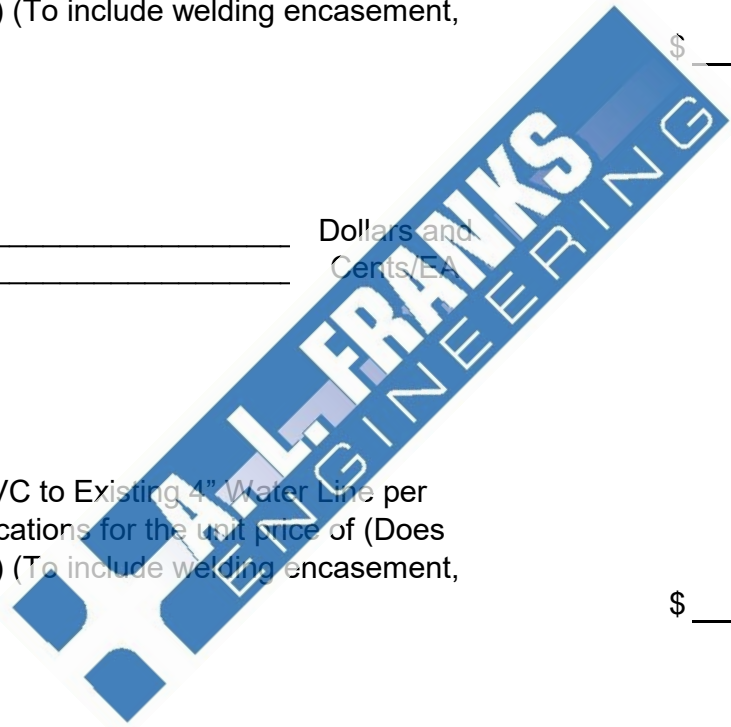


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
21	3	EA	Tie in Prop. 8" PVC to Existing 2" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
22	2	EA	Tie in Prop. 8" PVC to Existing 3" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

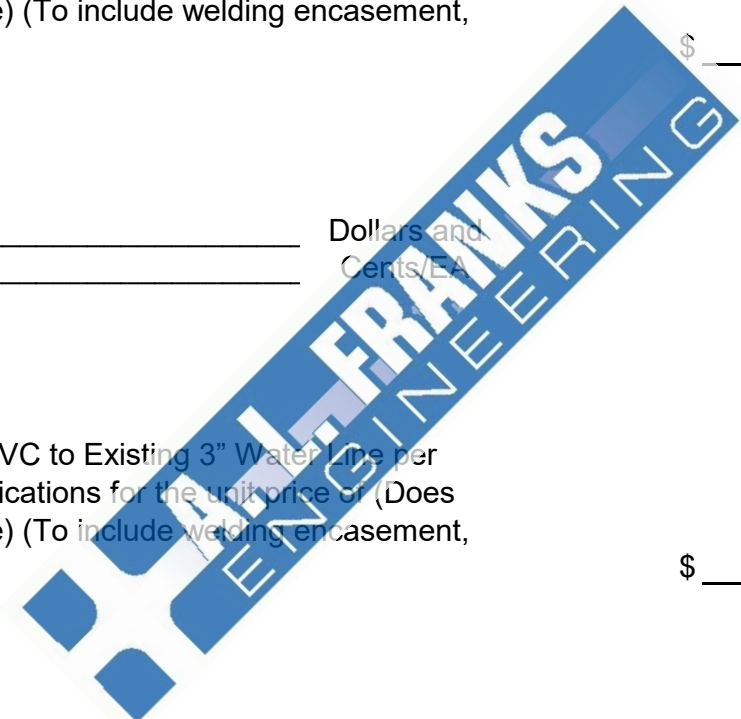

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
23	2	EA	Tie in Prop. 8" PVC to Existing 4" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
24	1	EA	Tie in Prop. 8" PVC to Existing 6" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

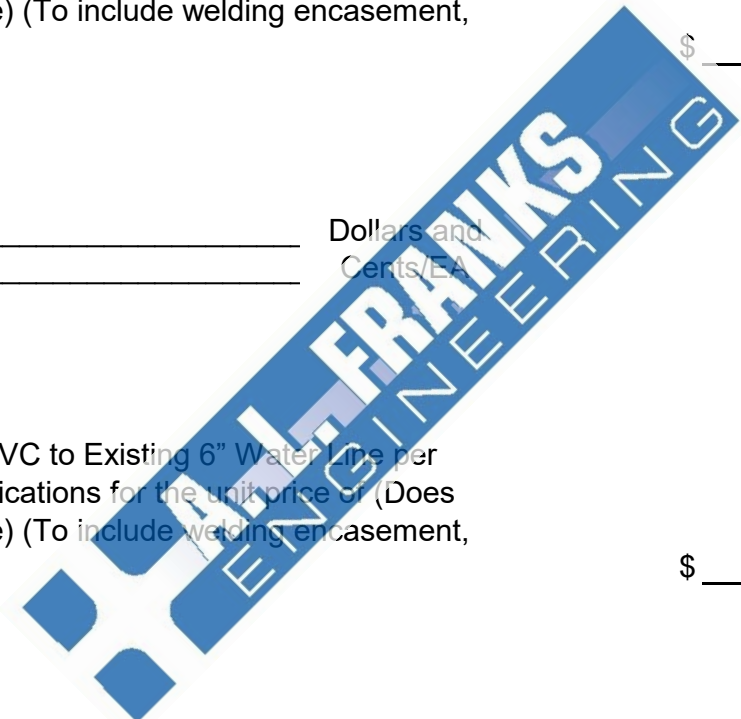


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
25	8	EA	Tie in Prop. 8" PVC to Existing 8" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
26	1	EA	Tie in Prop. 10" PVC to Existing 8" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
27	2	EA	Tie in Prop. 10" PVC to Existing 10" Water Line per plans and specifications for the unit price of (Does not include valve) (To include welding encasement, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		
28	1150	L.F.	Provide and Install Type 1 Creek Crossing for 8" Water Main per plans and specifications for the unit price of (Includes the pipe, casing, carrier, spacers, and valves as shown on plans)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

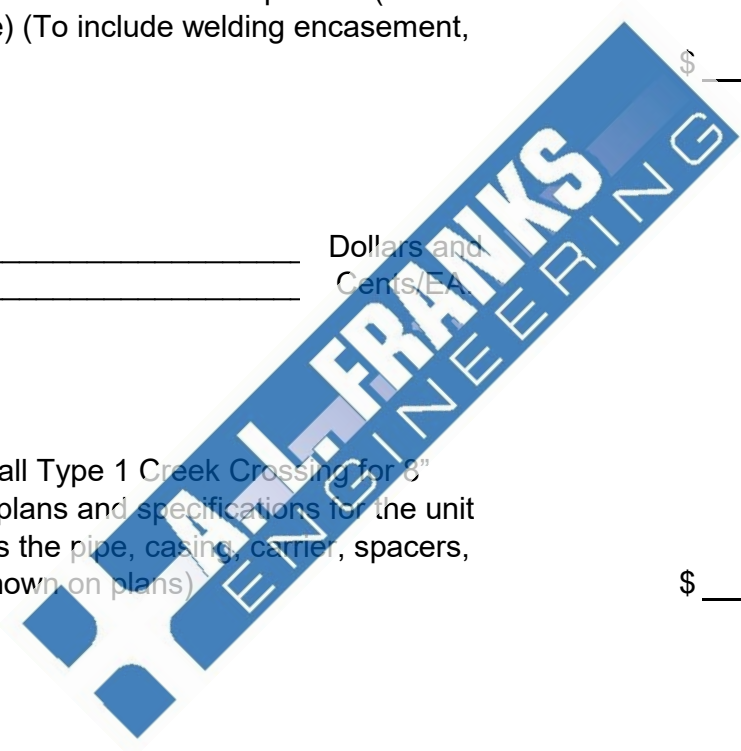

BID PROPOSAL CONTINUED


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
29	400	L.F.	Provide and Install Type 1 Creek Crossing for 10" Water Main per plans and specifications for the unit price of (Includes the pipe, casing, carrier, spacers, and valves as shown on plans)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
30	25	EA	Furnish and Install short side water meters to proposed ROW, including 1" service tap, 5/8"x3/4" Sensus iPERL meter, new meter box, setter, all necessary service line, and appurtenances per plans and specifications for the unit price of (Shall include tying new meter back into existing service line)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
31	17	EA	Furnish and Install HWY long side water meters to proposed ROW, including 1" service tap, 5/8"x3/4" Sensus iPERL meter, new meter box, setter, all necessary service line, and appurtenances per plans and specifications for the unit price of (Shall include tying new meter back into existing service line)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
32	3	EA	Furnish and Install HWY long side water meters to proposed ROW, including 2" service tap, 1.5" Sensus Omni meter, new meter box, setter, all necessary service line, and appurtenances per plans and specifications for the unit price of (Shall include tying new meter back into existing service line)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
33	1	L.S.	Furnish all labor and install all equipment for testing and sterilization of treated mains and appurtenances per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
34	1	L.S.	Trench Safety per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		

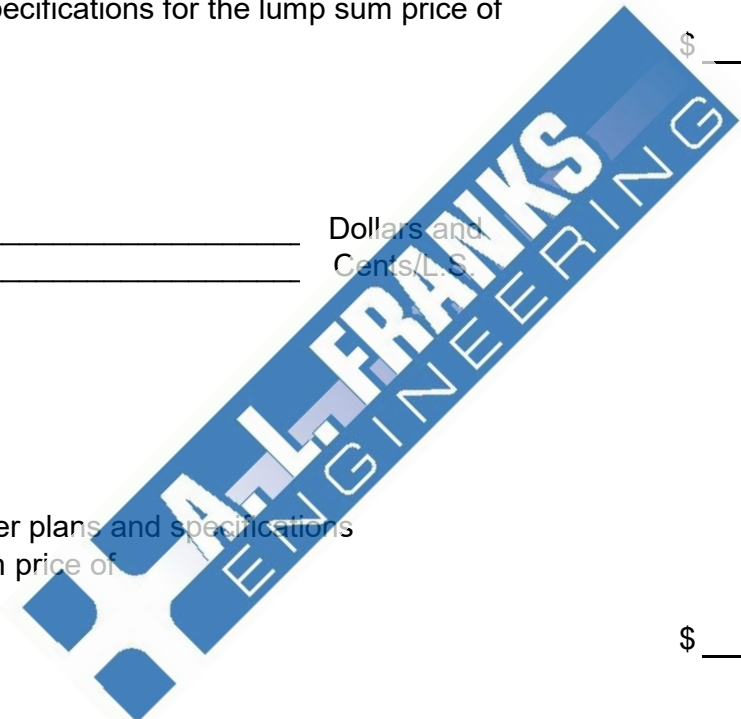

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
35	1	L.S.	Furnish all equipment, materials and labor for the Leak Detection System including valves, Valve boxes, 2" meter, meter box, taps and lines, per plans and specifications for the lump sum price of	\$ _____	\$ _____

_____ Dollars and
_____ Cents/L.S.

36	1	L.S.	Furnish and install equipment and labor, as necessary, to locate existing main, as shown, on the plans and specifications for the purpose of installing water utility marker, per plans and specifications for the lump sum price of	\$ _____	\$ _____
----	---	------	--	----------	----------


_____ Dollars and
_____ Cents/L.S.

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
37	1	L.S.	Furnish and install water utility markers including owners information and water line depth per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
38	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
39	1	L.S.	Furnish all equipment, materials and labor to implement and maintain the stormwater pollution preparedness plan (SWPPP) including re-seeding all disturbed areas per plans and specifications for the lump sum price of _____ Dollars and Cents/L.S. _____	\$ _____	\$ _____
40	1	L.S.	Cut/Cap and abandon existing water mains, in place, as necessary per plans and specifications for the lump sum price of _____ Dollars and Cents/L.S. _____	\$ _____	\$ _____
TOTAL BASE BID				\$ _____	_____

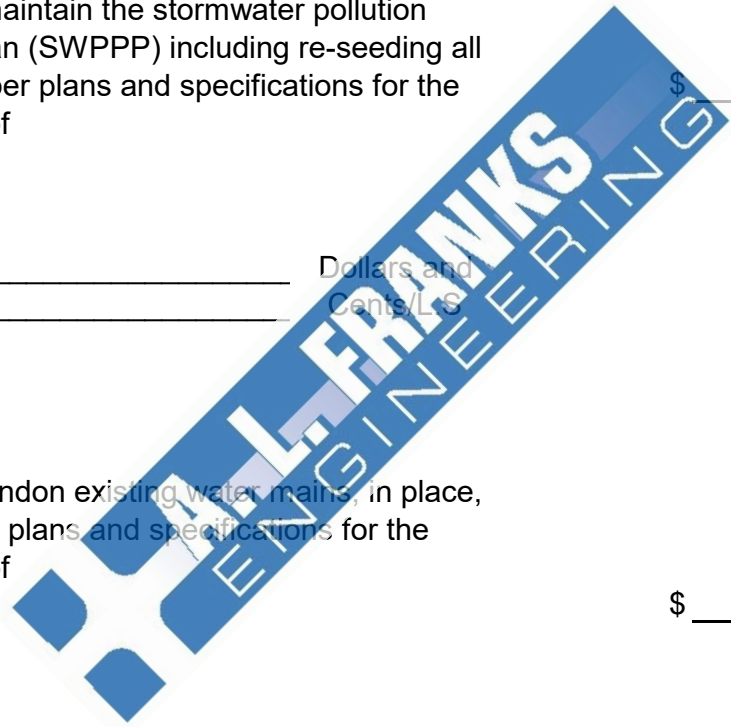

BID PROPOSAL CONTINUED

NOTES

- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
- 2) Time required to complete base bid work shall be 275 calendar days.
- 3) Contractor is solely responsible for the complete abandonment of all existing mains unless otherwise noted.
- 4) Contractor is solely responsible for coordinating work in and around the ARDOT Hwy contractors.
- 5) Contractor is responsible for coordination of ARDOT locating and marking the Hwy ROW.

