

ADDENDUM NO. 1

TO: ALL PLAN HOLDERS

RE: **Howard County, Arkansas- Water Main Replacement**

ADDENDUM DATE: September 20, 2023

The Plans, Specifications and Contract Documents for the above referenced project are hereby modified as follows:


1. Remove and replace Bid Proposal with attached Bid Proposal.

PROJECT CLARIFICATIONS

1. Project Clarification- Proposed water main to follow the existing water main alignment at all times unless approved by engineer and shall be contained within existing 20' utility easement, typically having a 5' or less separation from the existing water main.
2. There are 4 short side services as shown in the attached Bid Proposal. One of these services is a 2" service
3. Existing water main is to be abandoned in place.
4. No road or driveway crossings are anticipated to need encasements.

ADDENDUM NO.1 ISSUED BY:

A.L. FRANKS ENGINEERING

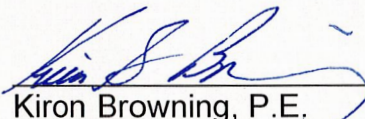
Kiron Browning, P.E.
Project Manager



NORTH HOWARD COUNTY, ARKANSAS

10" WATER MAIN REPLACEMENT

BID PROPOSAL


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	1	L.S.	Removal and disposal of existing fire hydrant and valves for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
3	7563	L.F.	Furnish and Install 10" C-900 Water Main and Fittings including trench excavation, laying, bedding, blocking and backfilling under Type 2 laying conditions per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
4	2	EA	Furnish and Install 10" M.J. Gate Valve including valve box and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
5	1	EA.	Tie-in to 10" Existing Water Main per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
6	1	EA.	Tie-in to 10" Existing Water Main w/ 10"x10" TS&V including cutting & capping of existing main per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	75	L.F.	Open Cut and Repair Gravel Driveway per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
8	90	L.F.	Open Cut and Repair Gravel Street per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
9	3	EA	Reconnect 5/8"x 3/4" Meter Set (Short Side Service) per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

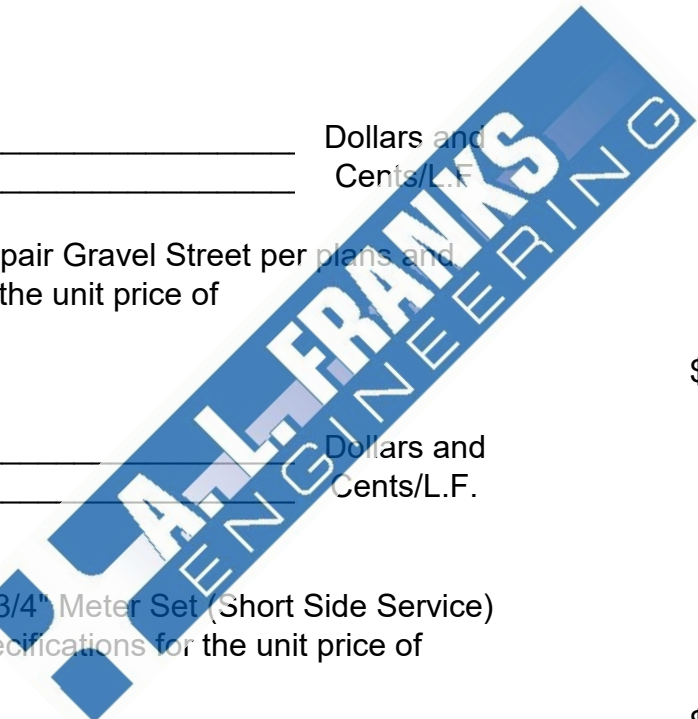


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
10	1	EA	Reconnect 2" Meter Set (Short Side Service) per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
11	2	EA	Reconnect 5/8"x 3/4" Meter Set (Long Side Service) per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
12	2	EA	Furnish and install 6" fire hydrant and gate valve (Approx. STA 36+00 & 75+60) per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

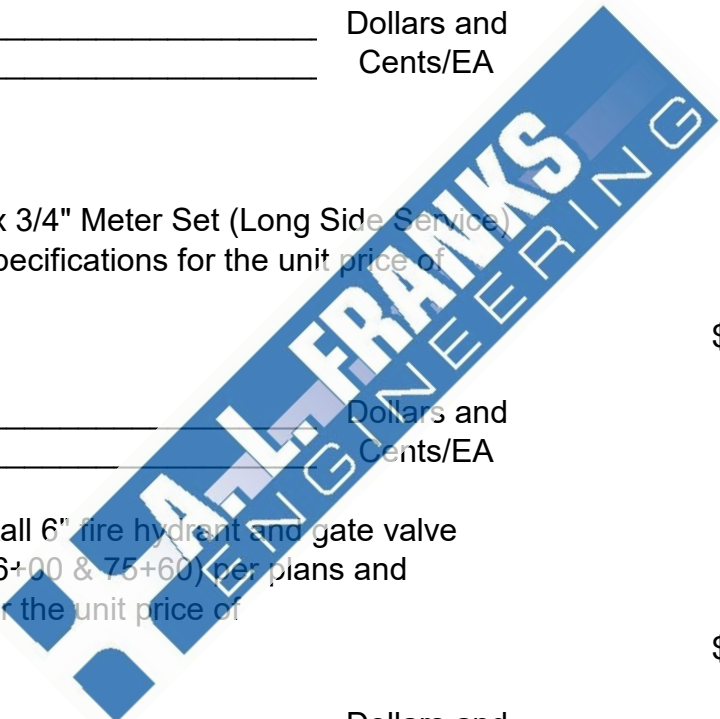

BID PROPOSAL CONTINUED
DESCRIPTION

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	1	EA	Furnish and install 2" air release valve (Approx. STA 36+00) per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
14	1	L.S.	Trench Safety per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
15	1	L.S.	Furnish all labor and install equipment for testing and sterilization of treated mains and appurtenances per plans and specifications for the lump sum of. _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
TOTAL BASE BID				\$ _____	_____

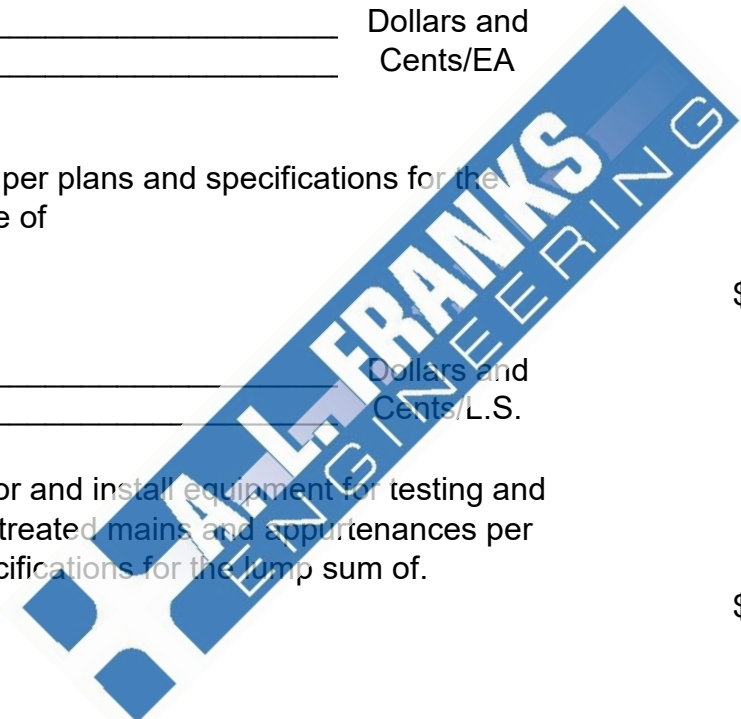

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
------	-----	------	-------------	------------	-------------

DEDUCTIVE ALTERNATE

1	1000	L.F.	Deduct from Item 1: Furnish and Install 10" C-900 Water Main and Fittings including trench excavation, laying, bedding, blocking and backfilling under Type 2 laying conditions per plans and specifications for the unit price of	\$ _____	\$ _____
---	------	------	---	----------	----------

_____ Dollars and
 _____ Cents/L.F.

2	25	L.F.	Deduct from Item 4: Open Cut and Repair Gravel Driveway per plans and specifications for the unit price of	\$ _____	\$ _____
---	----	------	---	----------	----------

_____ Dollars and
 _____ Cents/L.F.

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1	EA	Deduct from Item 6: Reconnect Meter Set (Short Side Service) per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
			TOTAL DEDUCTIVE ALTERNATE	\$ _____	
			TOTAL BASE BID LESS DEDUCTIVE ALTERNATE	\$ _____	

- NOTES**
- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
 - 2) Time required to complete base bid work shall be 120 calendar days.
 - 3) Contractor is solely responsible for the complete abandonment of all existing mains unless otherwise noted.