

CITY OF LOCKESBURG, ARKANSAS


TANK IMPROVEMENTS

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Blast and Re-coat the full interior of the 50,000 gallon elevated storage tank per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	1	L.S.	Blast and Re-coat the full exterior of the 50,000 gallon elevated storage tank (including concrete foundation) per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1	L.S.	Re-locate existing antenna and telecom equipment and maintain on temporary pole during construction for the lump sum price of.	_____ Dollars and Cents/L.S.	\$ _____
4	1	EA.	Furnish and install new sample tap on riser per the plans and specifications for the unit price of	_____ Dollars and Cents/EA.	\$ _____

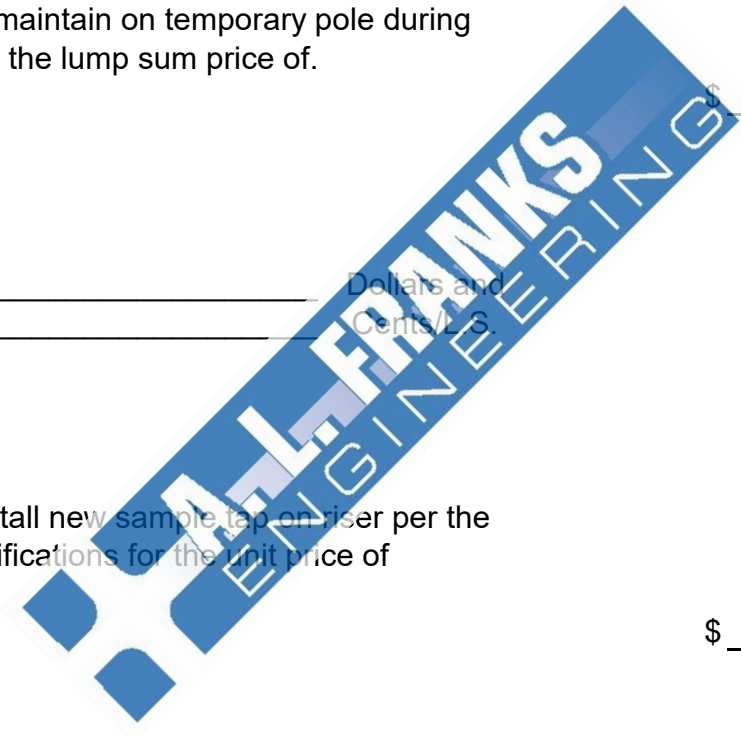


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	1	L.S.	Provide full containment for the EST for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
6	1	EA.	Furnish and Install new 30"x30" flanged roof access hatch on the tank per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		

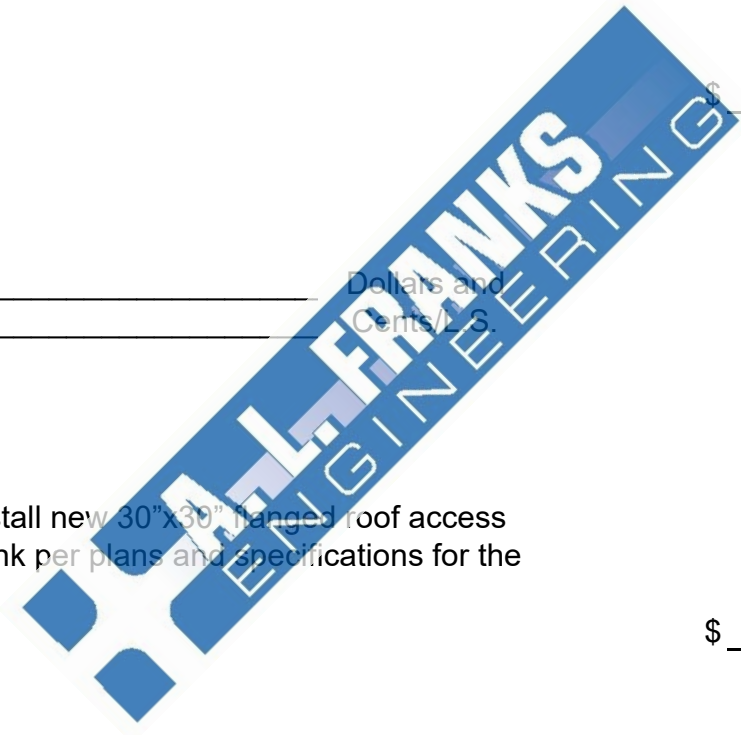

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	1	L.S.	Furnish and Install new #24 S.S. wire mesh on all vents and opening for the lump sum price of.	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
8	1	L.S.	Provide and install 8" schedule 80 pvc riser pipe, including check valves, bracing, and appurtenances per plans and specs for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

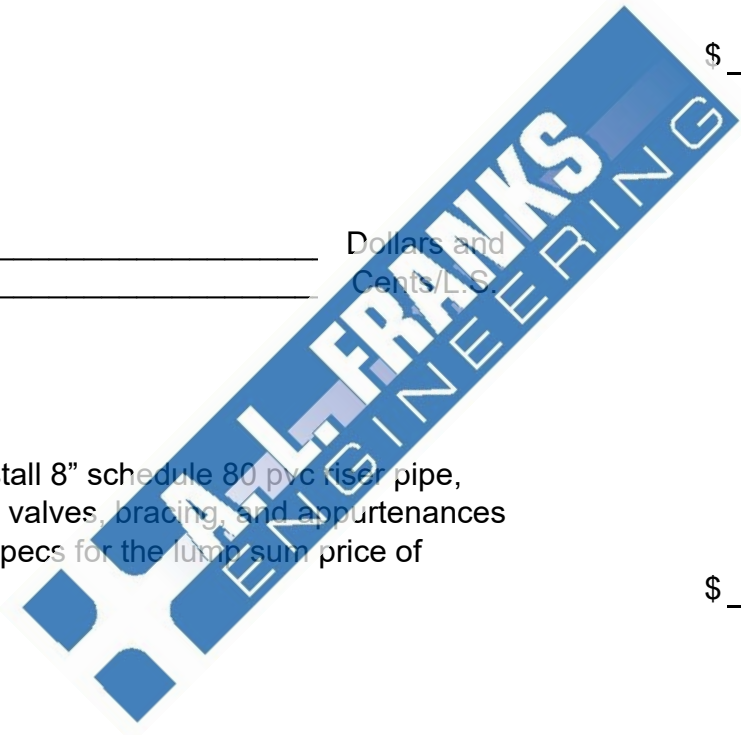


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	250	L.F.	Additional welding services, used at the direction of the Engineer, per plans and specs for the unit price of (Additional Welding completed without engineers prior approval will not be paid) (Welding necessary for other bid items shall be included in those line items)	\$ _____	\$ _____

Dollars and
Cents/L.F.


10	1	EA	Furnish and Install new 30"D flanged side access hatch on the tank wall per plans and specifications for the unit price of	\$ _____	\$ _____
----	---	----	--	----------	----------

Dollars and
Cents/EA

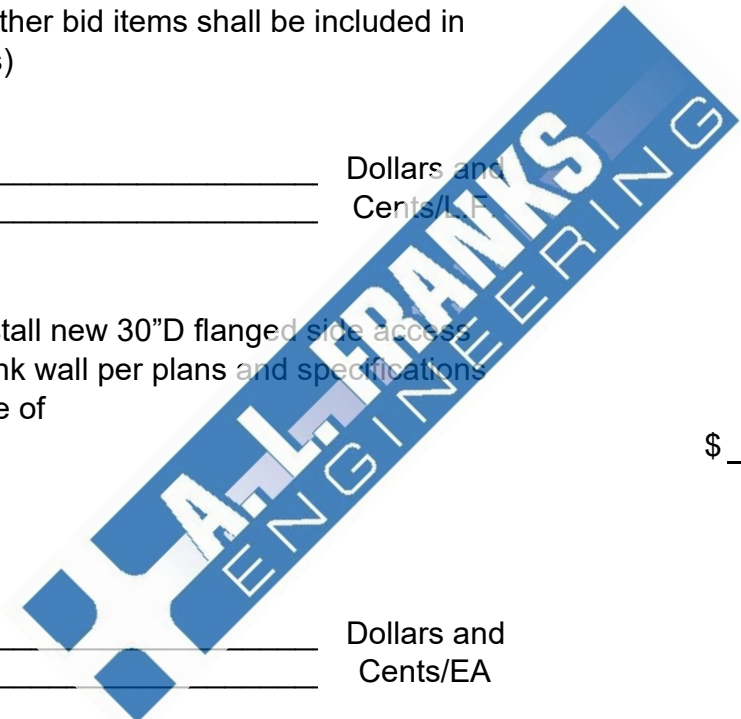

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	1	L.S.	Furnish and install all equipment, materials and labor necessary to extend the existing EST overflow (6" steel) to within 18-24" of ground level and install flapper valve and concrete pad per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
12	1	L.S.	Furnish and install new locks on all hatches and manways on the EST for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

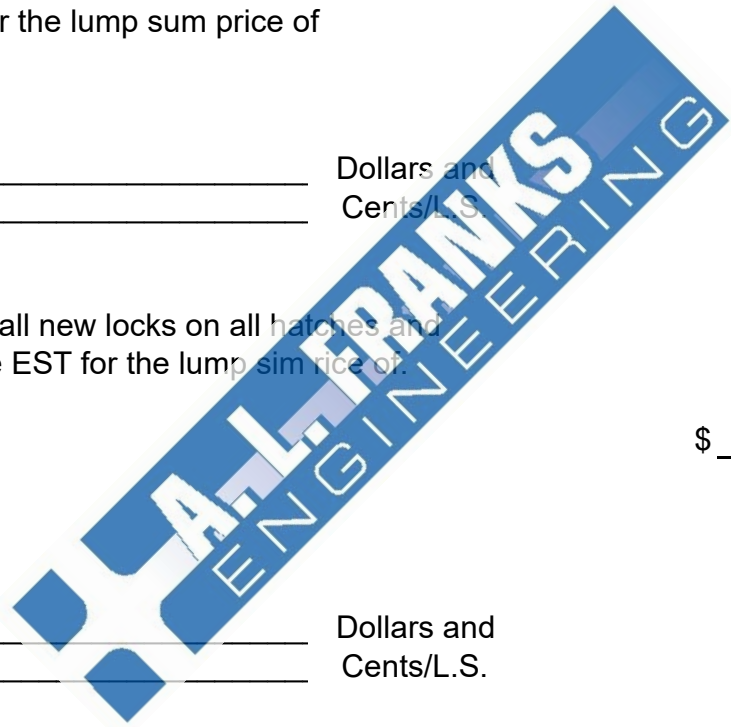


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	1	L.S.	Weld the post-head to shell connection completely prior to blacsting and coating per plans and specifications for the lump sum price of.	\$ _____	\$ _____

Dollars and
Cents/L.S.

14	1	L.S.	Furnish and Install new confined space entry signage on all manways per plans and specifications for the lump sum price of	\$ _____	\$ _____
----	---	------	--	----------	----------

Dollars and
Cents/L.S.

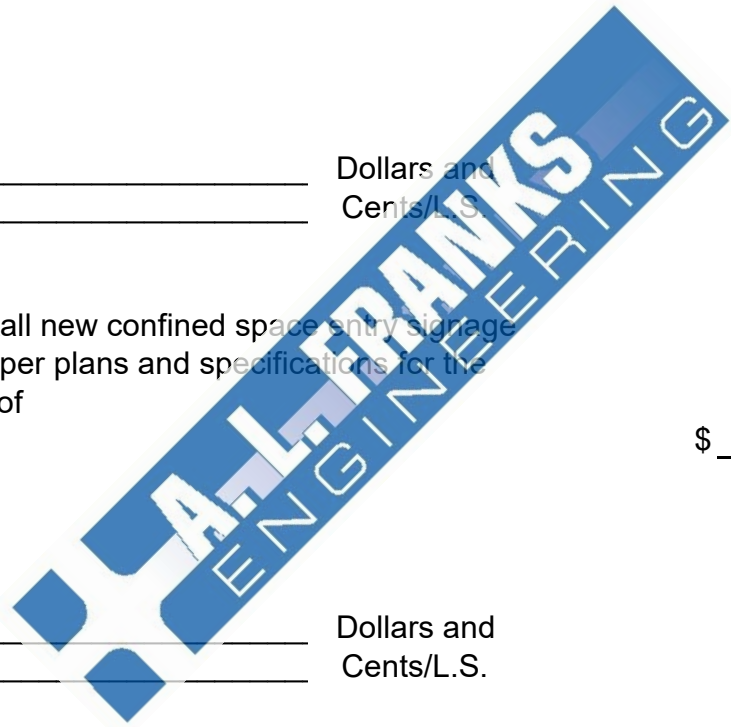

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
15	1	L.S.	Furnish and Install new roof vent per plans and specifications for the unit price of.		

\$ _____

\$ _____

Dollars and

Cents/L.S.


16	1	L.S.	Provide Temporary water storage and pressure & pump communication for use throughout construction per Plans and specifications for the lump sum price of		
----	---	------	--	--	--

\$ _____

\$ _____


Dollars and

Cents/L.S.

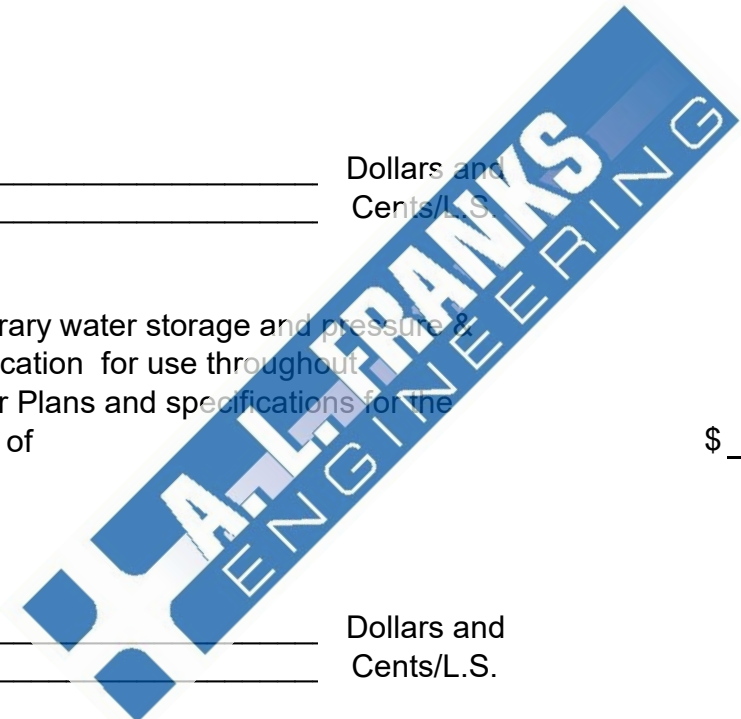


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
17	1	L.S.	Lead Abatement, if necessary, for the EST, per plans and specifications for the lump sum price of (Contractor shall sample coating and provide results to the engineer prior to blasting)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
18	1	L.S.	Replace level indicator on the EST per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

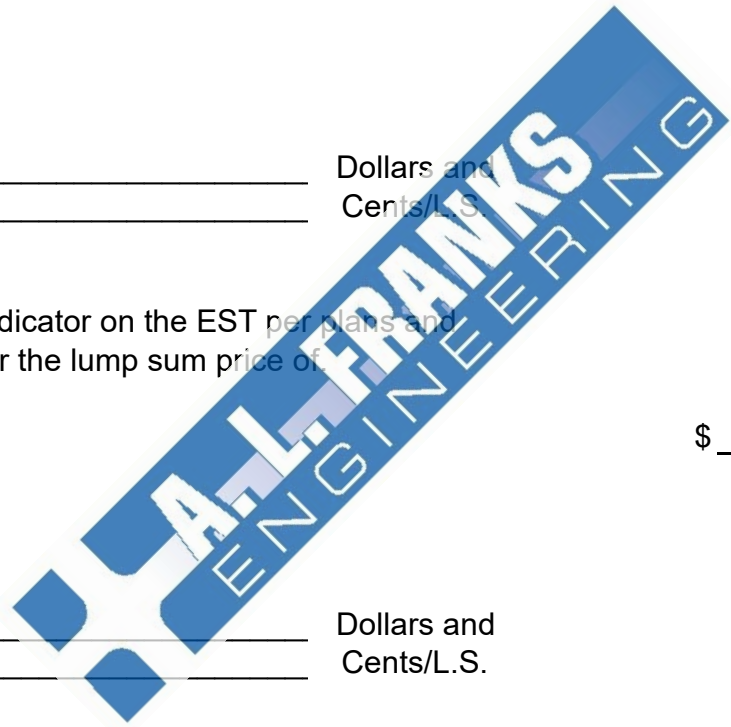

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
19	1	L.S.	Tighten all tensioning rods for the lump sum price of.	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		=====
20	1	L.S.	Replace interior access ladder per plans and specifications for the lump sum price of.	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

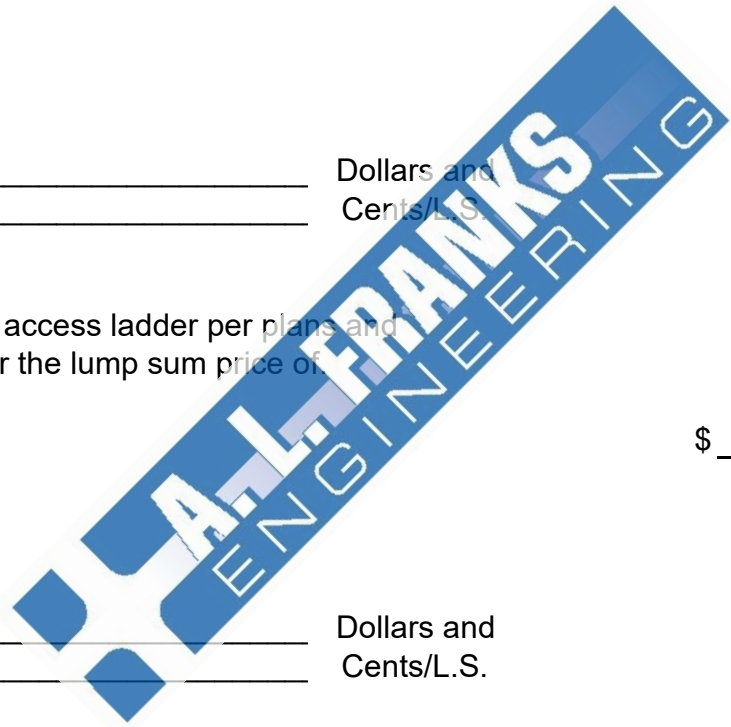

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
21	1	L.S.	Replace exterior shell and roof access ladder per plans and specifications for the lump sum price of.		

\$ _____ \$ _____

 _____ Dollars and
 Cents/LS.

TOTAL BASE BID

\$ _____

1	1	L.S.	DEDUCTIVE ALTERNATE #1 Item 18 - Furnish, Install and operate 3 pressure relief valves on sytem fire hydrants in lieu of the temporary pressure storage tanks per plans and specifications for the deduct lump sum price of		
---	---	------	--	--	--

\$ _____ \$ _____

 _____ Dollars and
 Cents/LS..

TOTAL DEDUCTIVE ALTERNATE

\$ _____

TOTAL BASE LESS DEDUCTIVE ALTERNATE

\$ _____

BID PROPOSAL CONTINUED

NOTES:

- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
- 2) Time required to complete base bid work shall be 90 calendar days.
- 3) Contractor is solely responsible for following all applicable local, state and federal laws for lead abatement and disposal, as necessary.
- 4.) Due to global raw material shortage in the coatings industry, it is in the best interest of the owner, engineer, and the job to purchase all coatings needed in one order. This will allow the project to continue and not slow due to unforeseen shortages.

