

CITY OF SMACKOVER, ARKANSAS
7TH AND 8TH STREET SIDEWALKS (TAP-20)(S)

BID PROPOSAL


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Removal and disposal including, but not limited to concrete sidewalks, curbs, gutters, asphalt sections trees, and brush including all necessary saw cutting as shown on the plans for the lump sum price of _____ Dollars and _____ Cents/L.S	\$ _____	\$ _____
2	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/L.S	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1	L.S.	Maintenance of Traffic per the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
4	1,400	S.Y.	Concrete flatwork 4" thick including any grading, paving sand, reinforcement, Etc per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.Y.		


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	125	S.Y.	Concrete flatwork 6" thick including any grading, paving sand, reinforcement, etc. per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.Y.		
6	50	L.F.	Laydown Concrete curb including sawcut line on the edge of asphalt per the plans and specifications for the unit price of (laydown curb at wheelchair ramps to be included in ramp bid item)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

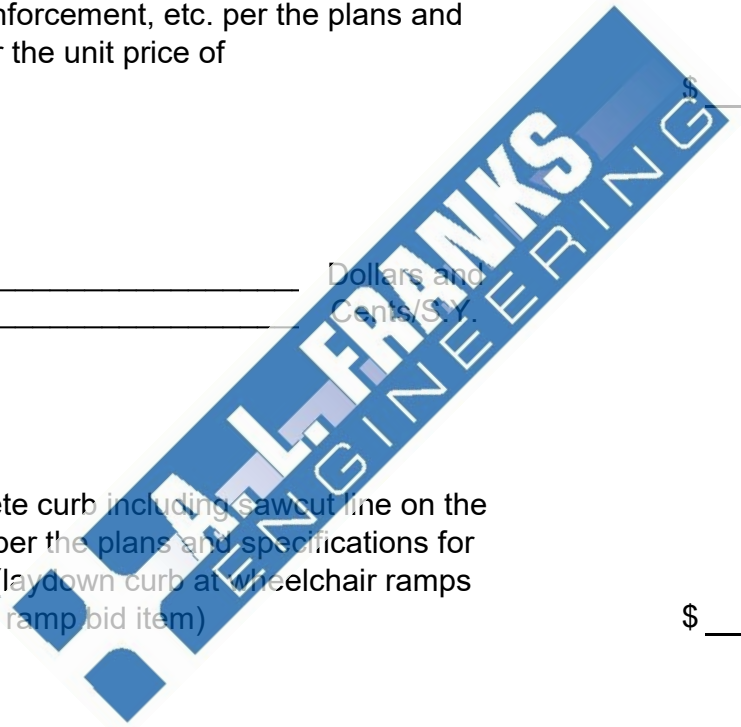


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	11	EA	Furnish and install wheelchair ramps type 3 including any transitional ramps, landings, etc. to have a legal ramp per the plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
8	5	EA	Furnish and install standard wheelchair ramps including any transitional ramps, landings, etc. to have a legal ramp per the plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

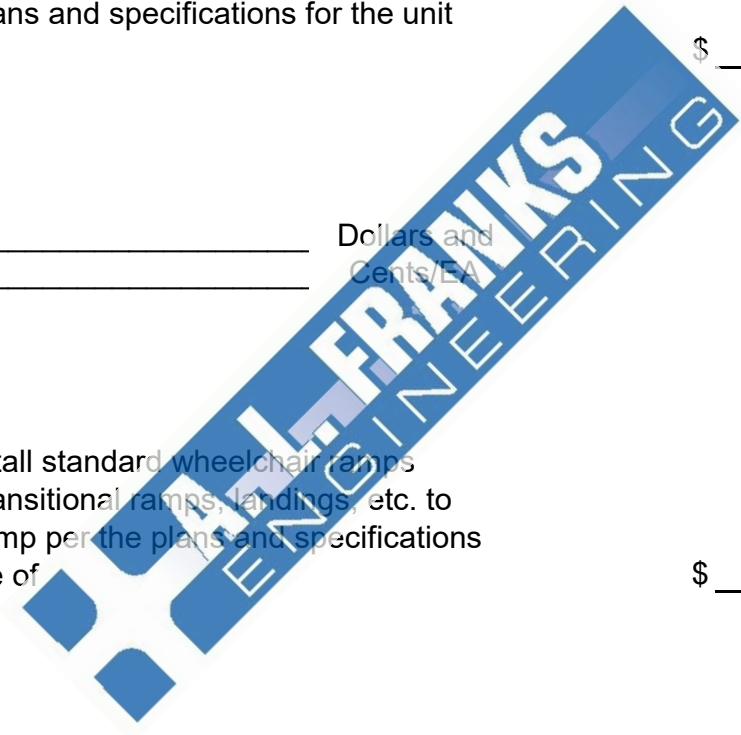


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	1	EA	Diamond Plate Steel for sidewalk drains to be bolted per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
10	4	EA	Furnish and Install all materials and labor to install headwall per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

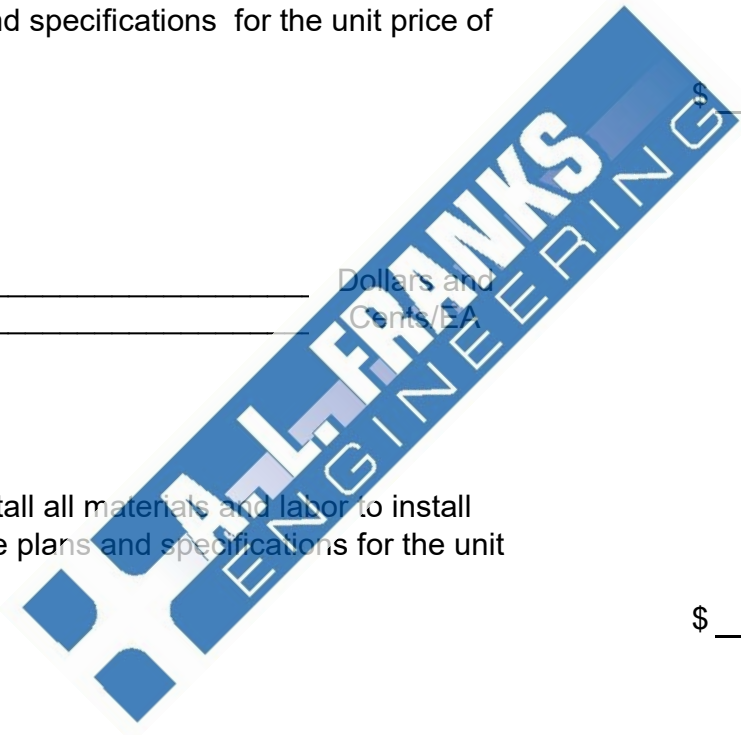


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	80	L.F.	Handrail per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
12	64	S.F.	Furnish and Install Traffic Control Devices, (4 Road Work Signs Total) including but not limited to, installing, maintaining, moving from one location to another and removing traffic control devices according to the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.		

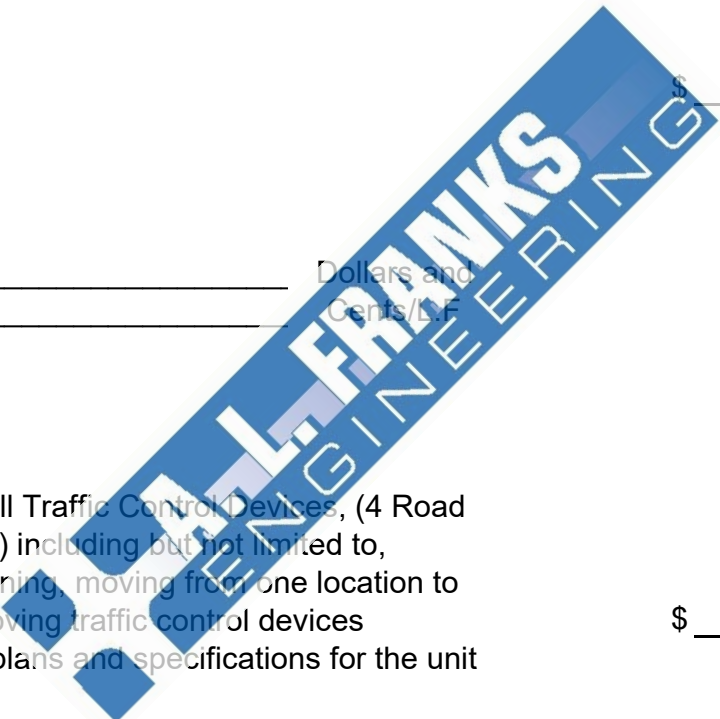


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	12	EA	Re-install street signs using sidewalk penetration detail per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
14	11	EA	Pedestrian crosswalk signs per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

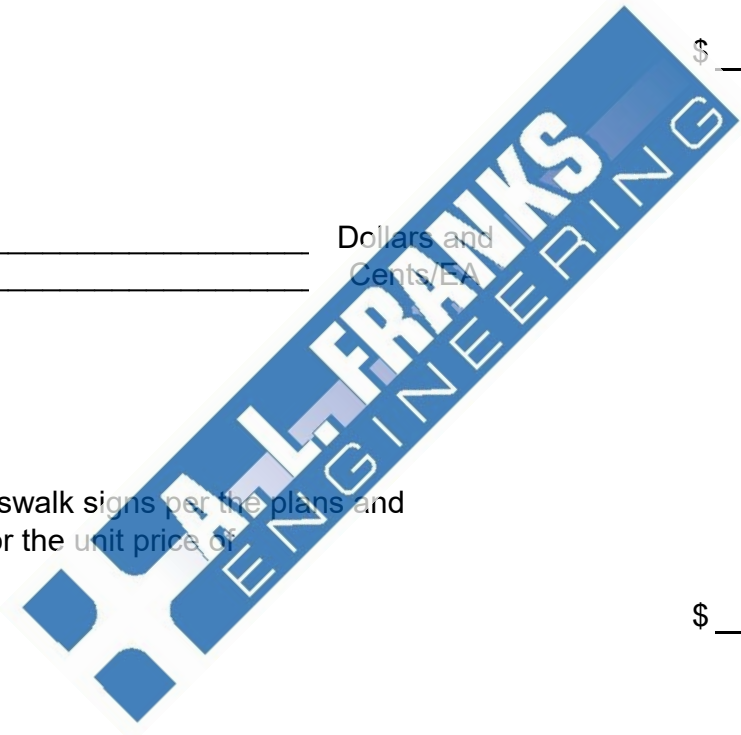

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
15	6	EA	Furnish and Install crosswalk striping per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
16	25	L.F.	Furnish and Install drain pipe in the various sizes shown per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F		

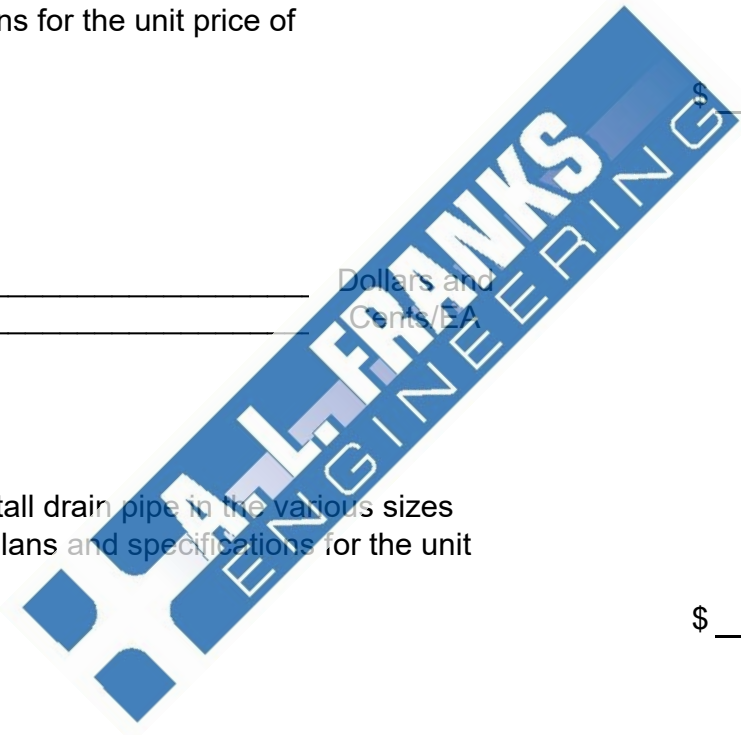

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
17	10,920	S.F.	Grade and Seed sidewalk area per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.F.		
18	1	L.S.	Grade and cut/fill as directed by the engineer around the sidewalk area after installation of the sidewalk to achieve 3:1 slope requirements and stabilization per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

BID PROPOSAL CONTINUED

TOTAL OF ALL ITEMS

\$ _____

- NOTES: 1) Submission of the completed Bid Proposal is considered evidence to the Owner that the Contractor fully and clearly understands the complete scope of work and all actions and materials required to complete the work.
- 2) Items required but not specifically called out in the Bid Proposal shall be included in other items.
- 3) Time required to complete base bid work shall be 120 calendar days.

