


**SEVIER COUNTY WATER ASSOCIATION
GROUND STORAGE TANK (100'D x 24')**

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Blast and Re-coat the full interior of the GST per plans and specifications for the lump sum price of (Including all baffle walls)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
2	1	L.S.	Blast, Re-coat and add the Logo on the full exterior of the GST per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	2	EA.	Furnish and Install new roof vent for the GST per plans and Specifications including all labor, materials and #24 stainless steel mesh screen for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
4	1	L.S.	Furnish and install NSF approved caulk for the interior roof to rim angle connection, for the lump sum price of:	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

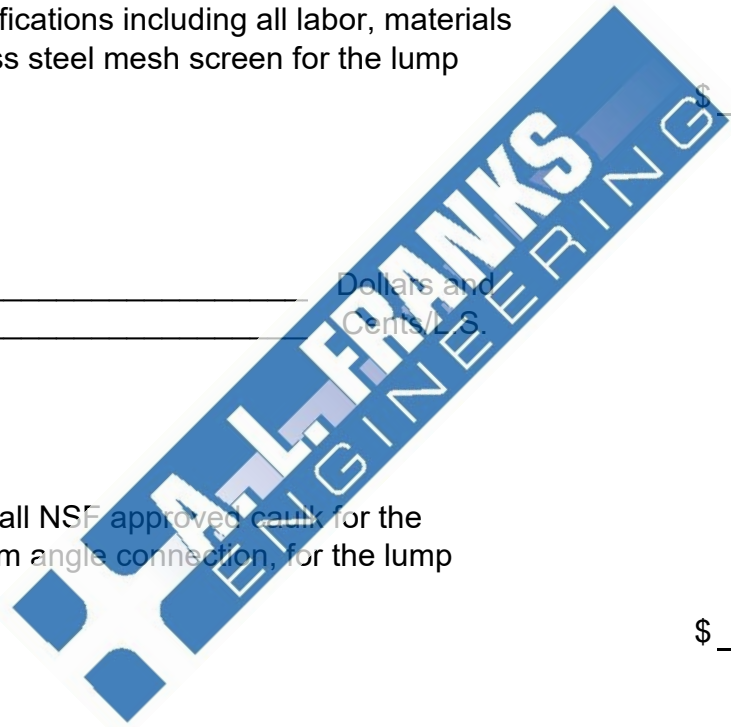

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	1	L.S.	Provide full containment for the GST for the lump sum price of	_____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
6	200	L.F.	Additional welding services, used at the direction of the Engineer, per plans and specs for the unit price of (Additional Welding completed without engineers prior approval will not be paid) (Welding necessary for other bid items shall be included in those line items)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

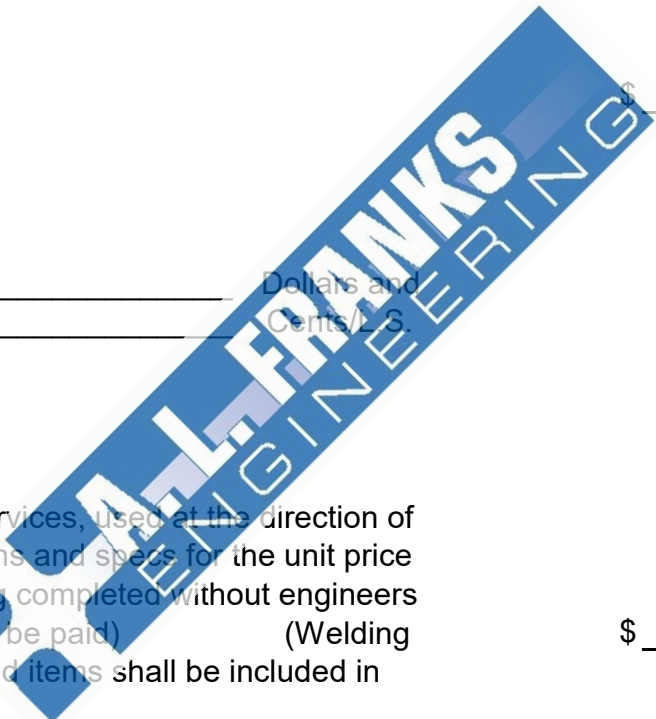

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	1	EA	Furnish and Install new 30"x30" flanged roof access hatch on the tank per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
8	1	L.S.	Clean all dirt and foreign material from between tank bottom and concrete, re-caulk seam, and tighten all foundation anchor bolts, prior to blasting and coating for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	1	L.S.	Furnish and Install new #24 S.S. wire mesh on all vents and opening for the lump sum price of.		

\$ _____

\$ _____


Dollars and
Cents/L.S.

10	1	EA	Furnish and Install new 30"D flanged side access hatch on the tank wall per plans and specifications for the unit price of
----	---	----	--

\$ _____

\$ _____


Dollars and
Cents/EA

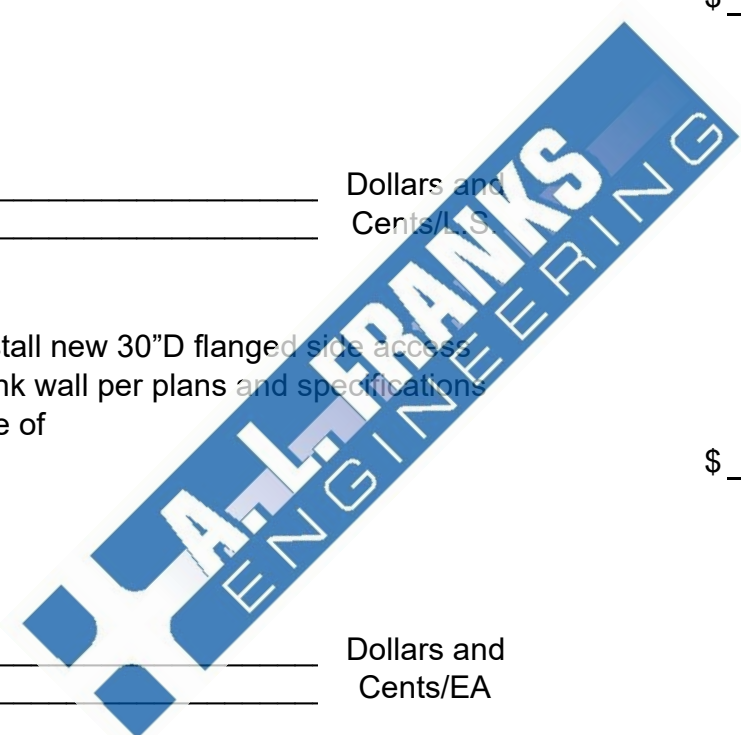

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	1	L.S.	Furnish and Install new confined space entry signage on all manways per plans and specifications for the lump sum price of	\$ _____	\$ _____

Dollars and
Cents/L.S.

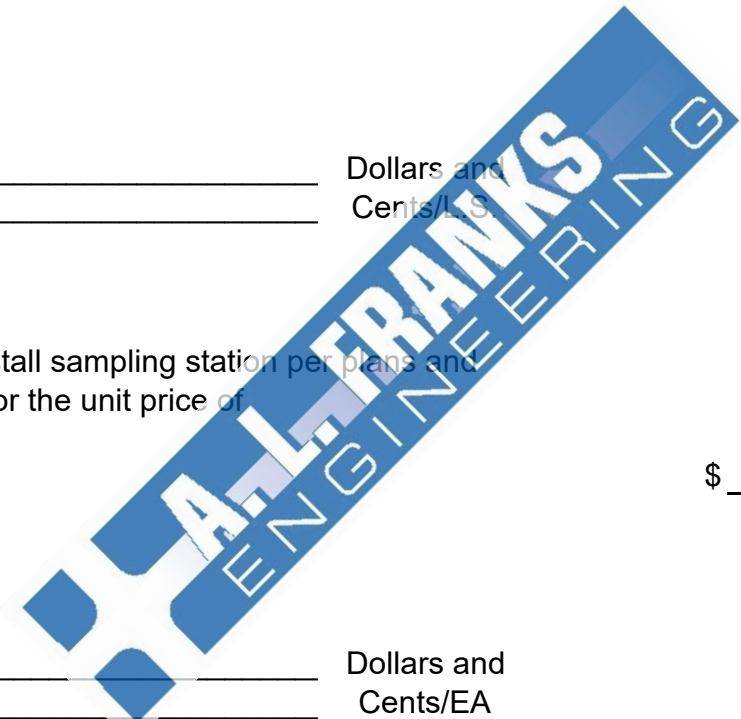

12	1	EA	Furnish and Install sampling station per plans and specifications for the unit price of	\$ _____	\$ _____
----	---	----	---	----------	----------

Dollars and
Cents/EA

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	1	EA	Furnish and install all equipment material and labor to replace the existing overflow with a new, 20", steel overflow pipe per plans and specifications for the lump sum price of	\$ _____	\$ _____

_____ Dollars and
 _____ Cents/EA

TOTAL ITEMS \$ _____

- NOTES:**
- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
 - 2) Time required to complete base bid work shall be 90 calendar days. Construction will NOT start until after November 1, 2024.
 - 3) Contractor is solely responsible for following all applicable local, state and federal laws for lead abatement and disposal, as necessary.
 - 4.) Due to global raw material shortage in the coatings industry, it is in the best interest of the owner, engineer, and the job to purchase all coatings needed in one order. This will allow the project to continue and not slow due to unforeseen shortages.
 - 5.) THE CLEARWELL WILL NOT BE TAKEN OUT OF SERVICE FOR CONSTRUCTION UNTIL ON OR AFTER OCTOBER 1, 2024.**

P-8

