

ADDENDUM NO. 1

TO: ALL PLAN HOLDERS

RE: CITY OF DEQUEEN, ARKANSAS-GROUND STORAGE IMPROVEMENTS

ADDENDUM DATE: October 4, 2023


The Plans, Specifications and Contract Documents for the above referenced project are hereby modified as follows:

1. Bid Proposal Item 17 added to include: Lead abatement and disposal per federal and state regulations ***See the attached Bid Proposal.***

Clarification-The Ground Storage is a 1,000,000 Gallon Tank.

ADDENDUM NO.1 ISSUED BY:

A.L. FRANKS ENGINEERING


Kiron Browning, P.E.
Project Manager




CITY OF DEQUEEN, ARKANSAS

GROUND STORAGE (72'D x 35')


BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Blast and Re-coat the full interior of the 72'd x 35' GST per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
2	1	L.S.	Blast, Re-coat and add the Logo on the full exterior of the 72'd x 35' GST per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

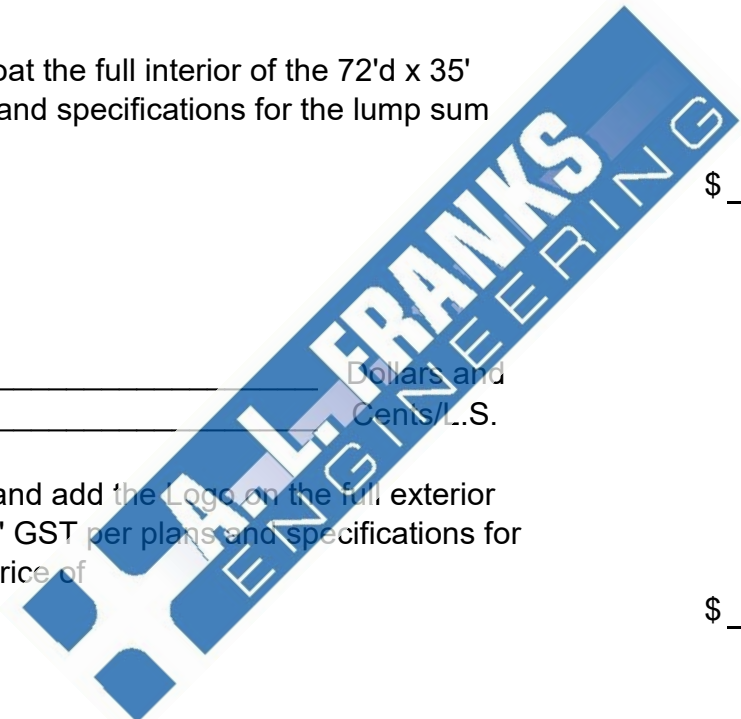


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1	L.S.	Furnish and Install new roof vent for the GST per plans and Specifications including all labor, materials and #24 stainless steel mesh screen for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
4	1	L.S.	Furnish and install NSF approved caulk for the interior roof to rim angle connection, for the lump sum price of:	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

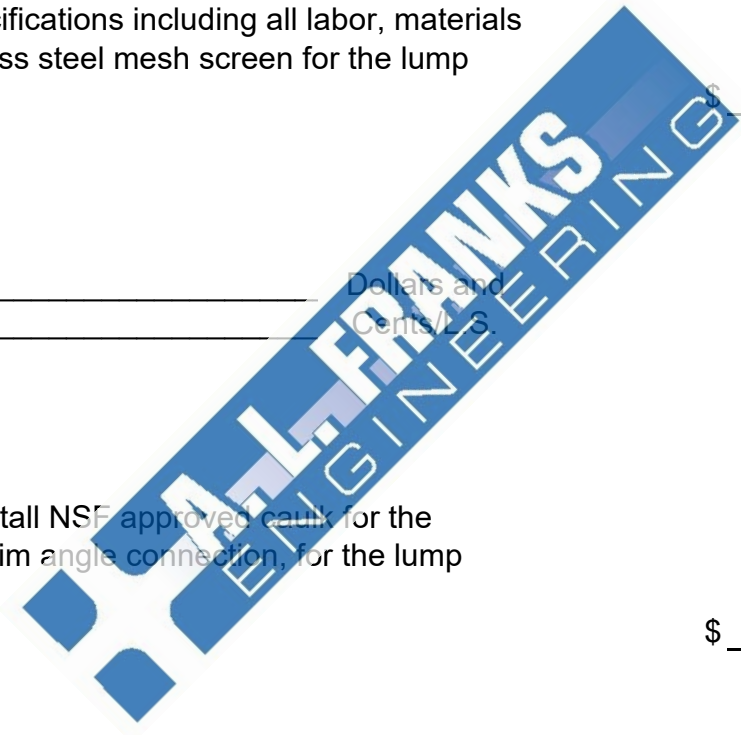

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	1	L.S.	Furnish and install new interior ladder w/ safety climb device for the Stand Pipe for the lump sum price of: _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
6	1	L.S.	Furnish and install new sample tap per the plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

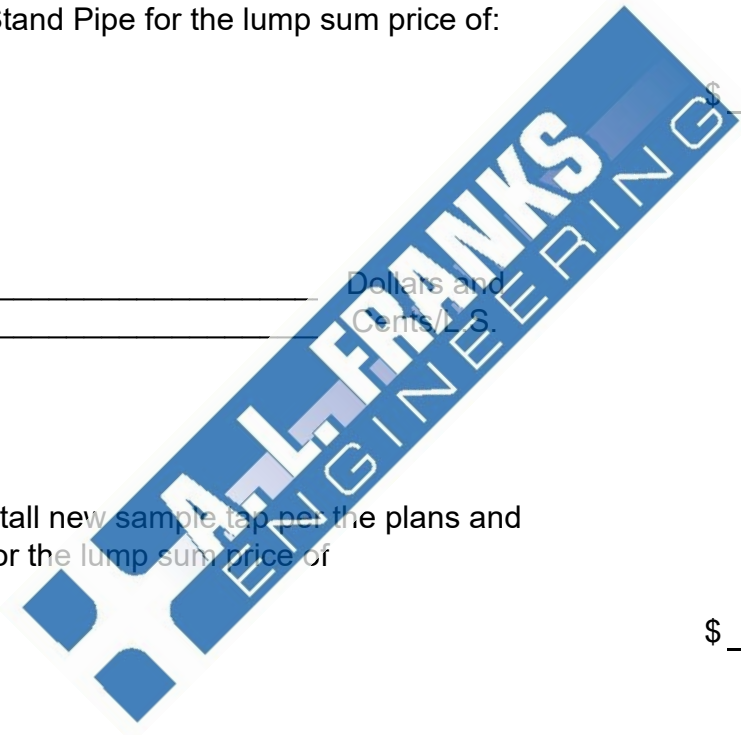

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	1	L.S.	Provide full containment for the GST for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
8	1	L.S.	Provide and install 10" schedule 80 pvc riser pipe, including check valves, bracing, and appurtenances per plans and specs for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	100	L.F.	Additional welding services, used at the direction of the Engineer, per plans and specs for the unit price of (Additional Welding completed without engineers prior approval will not be paid) (Welding necessary for other bid items shall be included in those line items)	\$ _____	\$ _____

Dollars and
Cents/L.F.

10	1	EA	Furnish and Install new 30"x30" flanged roof access hatch on the tank per plans and specifications for the unit price of	\$ _____	\$ _____
----	---	----	--	----------	----------

Dollars and
Cents/EA

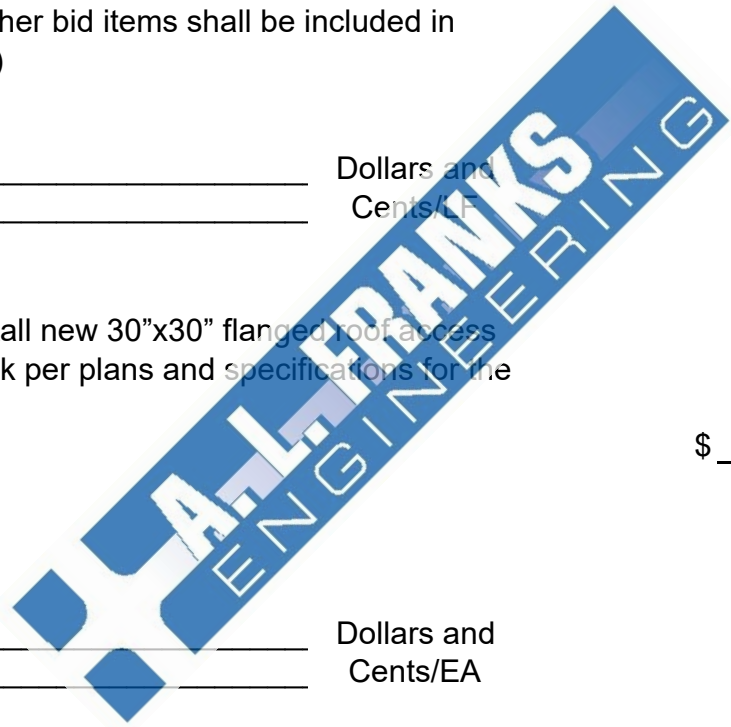

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	1	L.S.	Furnish and Install new #24 S.S. wire mesh on all vents and opening for the lump sum price of.		

\$ _____

\$ _____


Dollars and
Cents/L.S.

12	1	EA	Furnish and Install new 30"D flanged side access hatch on the tank wall per plans and specifications for the unit price of		
----	---	----	--	--	--

\$ _____


\$ _____

Dollars and
Cents/EA

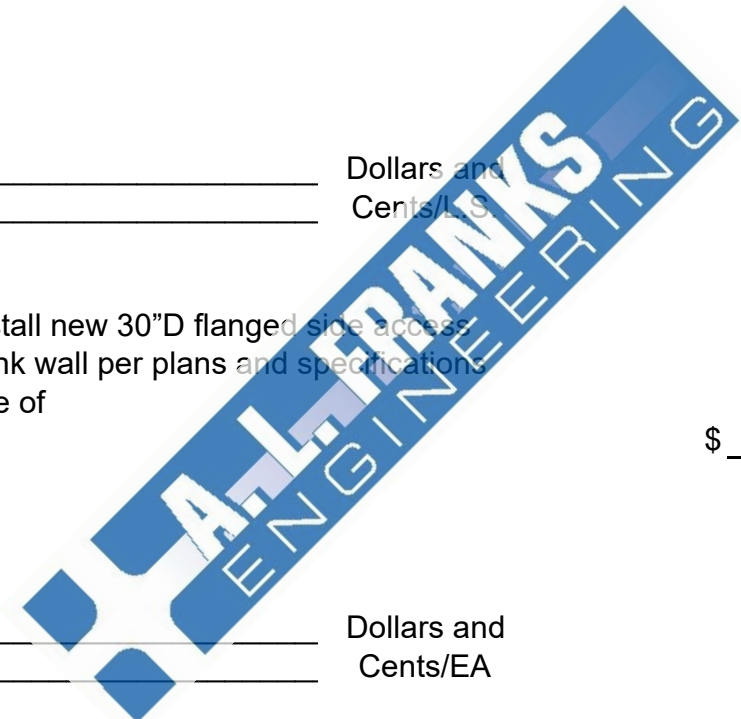


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	1	L.S.	Grade all dirt around tank to drain away from the foundation. Grade shall be 2-4" lower than existing concrete. Clean all dirt and foreign materil from between tank bottom and concrete, re-caulk seam, and tighten all foundation anchor bolts, prior to blasting and coating for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
14	1	EA	Furnish and Install new water level indicator per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

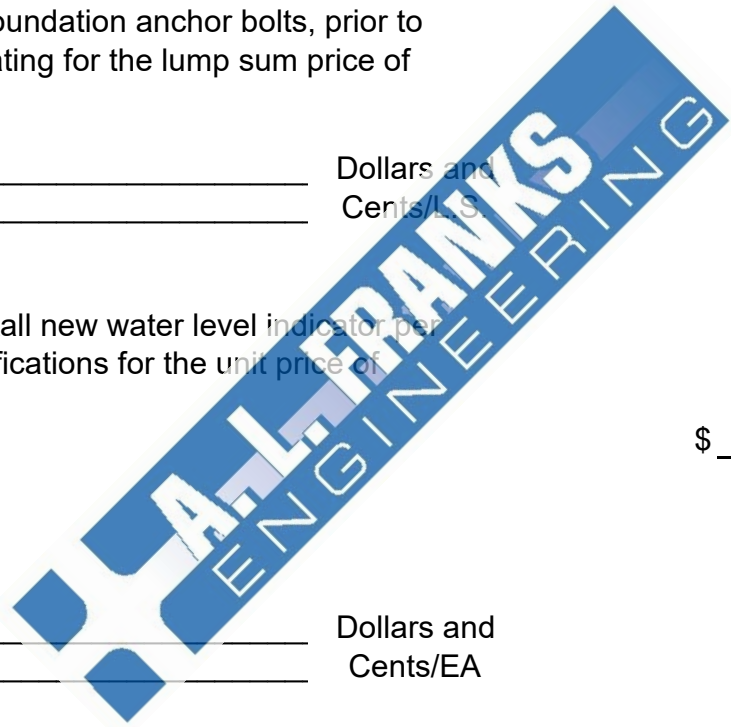


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
15	1	L.S.	Furnish and install all equipment, materials and labor necessary to modify the existing 6" overflow per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
16	1	L.S.	Furnish and Install new confined space entry signage on all manways per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

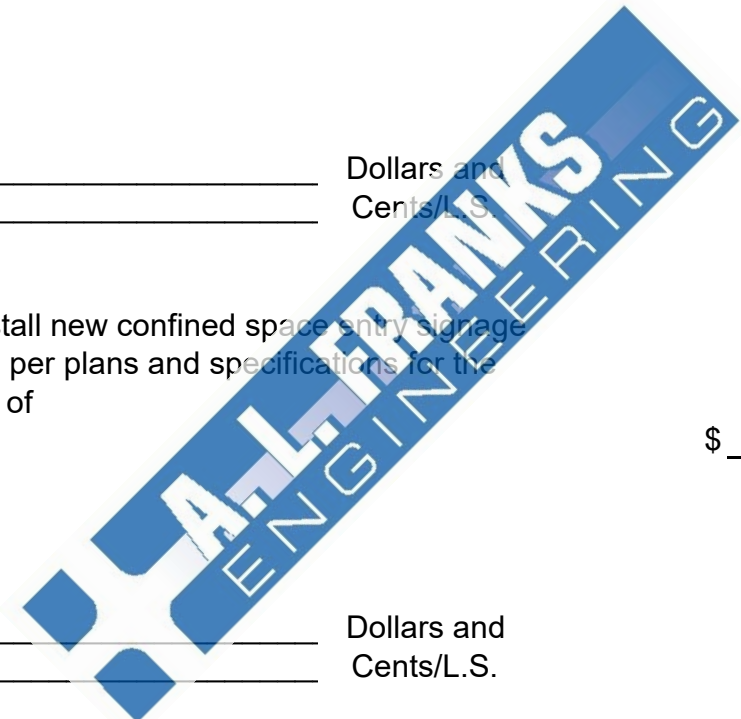

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
17	1	L.S.	Lead abatement and disposal per federal and state regulations for the lump sum of: (to be used if contractor provided lead test is positive)	\$ _____	\$ _____
<hr/> Dollars and Cents/L.S. <hr/>				<hr/>	
<p align="center">TOTAL BASE BID</p>				\$ _____	
1	50	L.F.	Additional welding services, used at the direction of the Engineer, per plans and specs for the unit price of (Additional Welding completed without engineers prior approval will not be paid) (Welding necessary for other bid items shall be included in those line items)	\$ _____	\$ _____
<hr/> Dollars and Cents/LF <hr/>				<hr/>	
<p align="center">TOTAL DEDUCTIVE ALTERNATE</p>				\$ _____	
<p align="center">TOTAL BASE LESS DEDUCTIVE ALTERNATE</p>				\$ _____	

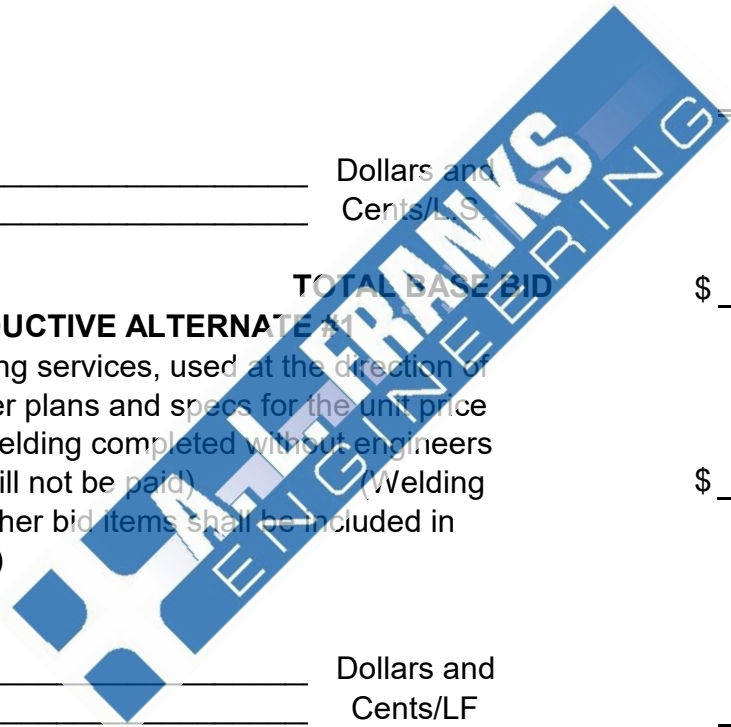

NOTES:

- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
- 2) Time required to complete base bid work shall be 75 calendar days.
- 3) Contractor is solely responsible for following all applicable local, state and federal laws for lead abatement and disposal, as necessary.
- 4.) Due to global raw material shortage in the coatings industry, it is in the best interest of the owner, engineer, and the job to purchase all coatings needed in one order. This will allow the project to continue and not slow due to unforeseen shortages.

