

**CITY OF PERRYTOWN, ARKANSAS**  
**WATER DISTRIBUTION SYSTEM IMPROVEMENTS**

**BID PROPOSAL**

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	3540	L.F.	Furnish and Install material, labor and equipment for 6" C-900 PVC Water Main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
2	2560	L.F.	Furnish and Install material, labor and equipment for 4" C-900 PVC Water Main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	2020	L.F.	Furnish and Install 3" PVC DR-21 Class 200 Treated Water Main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
4	100	L.F.	Furnish and Install material, labor and equipment for 2" poly water pipe DR-11 treated water main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	660	L.F.	Directional Bore 6" Certa-Loc Pipe C-900 Water main per plans and specifications for the unit price of (Directional Bore includes the pipe)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
6	240	L.F.	Directional Bore 4" Certa-Loc Pipe C-900 Water main per plans and specifications for the unit price of (Directional Bore includes the pipe)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	140	L.F.	Directional Bore 3" Certa-Loc Pipe DR-17 Water main per plans and specifications for the unit price of (Directional Bore includes the pipe)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
8	100	L.F.	Bore and Encase 6" Water Main in 0.375" x 12" Steel Encasement per plans and specifications for the unit price of (Bore and Encase does include the pipe and steel encasement)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	5	EA	Furnish and Install 6" Fire Hydrant Assembly including 6" Gate Valve, Blocking and Drain Rock per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
10	2	EA	Furnish and Install 2" Blow-Off Valves with valve marker per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	43	EA	Furnish and Install and 3/4" Short Side Service including up to 30 feet of service line Connections to existing meters per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
12	16	EA	Furnish and Install 3/4" Long Side Service including up to 120 feet of service line Connections by Directional Bore to existing meters per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	5	EA	Tie in Existing 2" Water Line per plans and specifications for the unit price of (Does not include valve)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
14	6	EA	Furnish and Install 6" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
15	4	EA	Furnish and Install 4" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
16	2	EA	Furnish and Install 2" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		




BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
17	100	L.F.	Open Cut and Repair Concrete Surface per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
18	100	L.F.	Open Cut and Repair Asphalt Surface per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

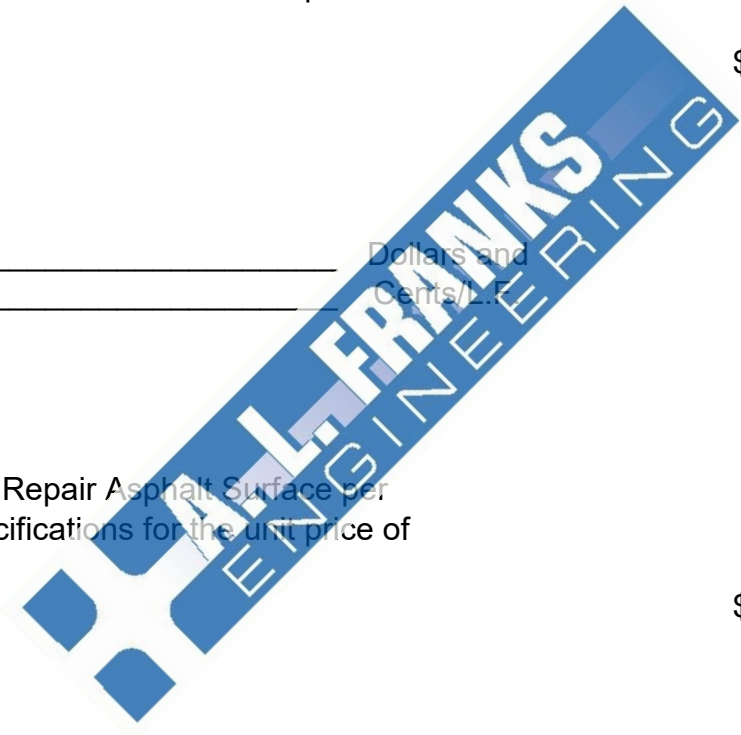

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
19	1	L.S.	Furnish all labor and install all equipment for testing and sterilization of treated mains and appurtenances per plans and specifications for the lump sum price of  _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
20	1	L.S.	Trench Safety per plans and specifications for the lump sum price of  _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

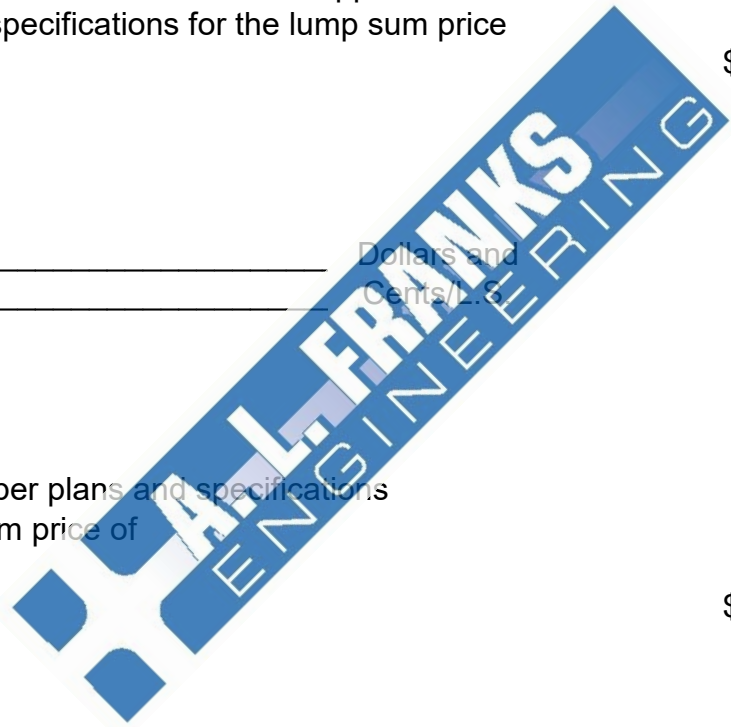


BID PROPOSAL CONTINUED

TOTAL BASE BID

\$ \_\_\_\_\_


**NOTES**

- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
- 2) Time required to complete base bid work shall be 120 calendar days.
- 3) Contractor is to perform and adhere to all requirements of the Storm Water Pollution Prevention Plan found in Exhibit "A" of the Technical Specs.
- 4) Contractor is solely responsible for the complete abandonment of all existing mains unless otherwise noted.

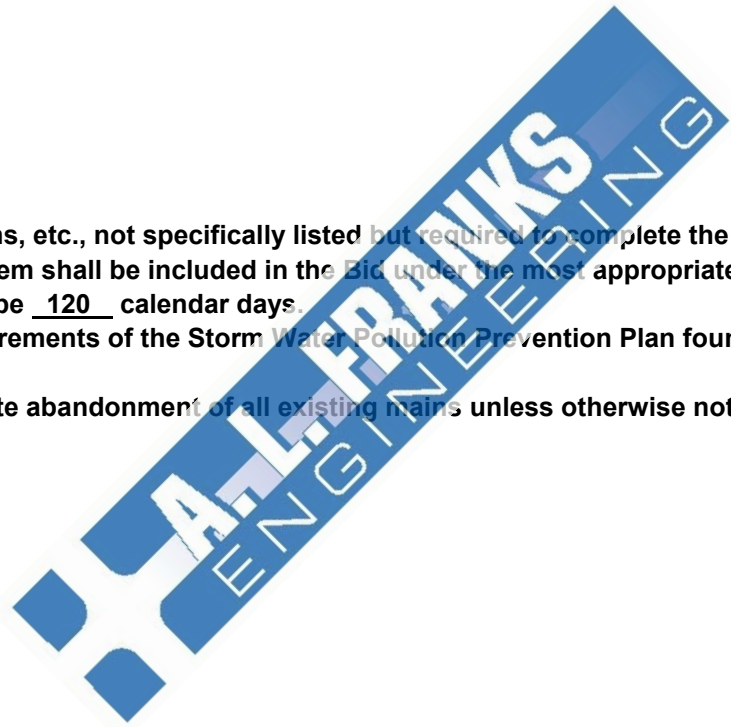

BID PROPOSAL CONTINUED  
DEDUCTIVE ALTERNATE #1

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
21	1580	L.F.	Deduct from bid item # 3 - Furnish and Install 3" PVC DR-21 Class 200 Treated Water Main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
22	115	L.F.	Deduct from Bid item #7 - Directional Bore 3" Certaloc Pipe DR-18 Water main per plans and specifications for the unit price of (Directional Bore includes the pipe)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

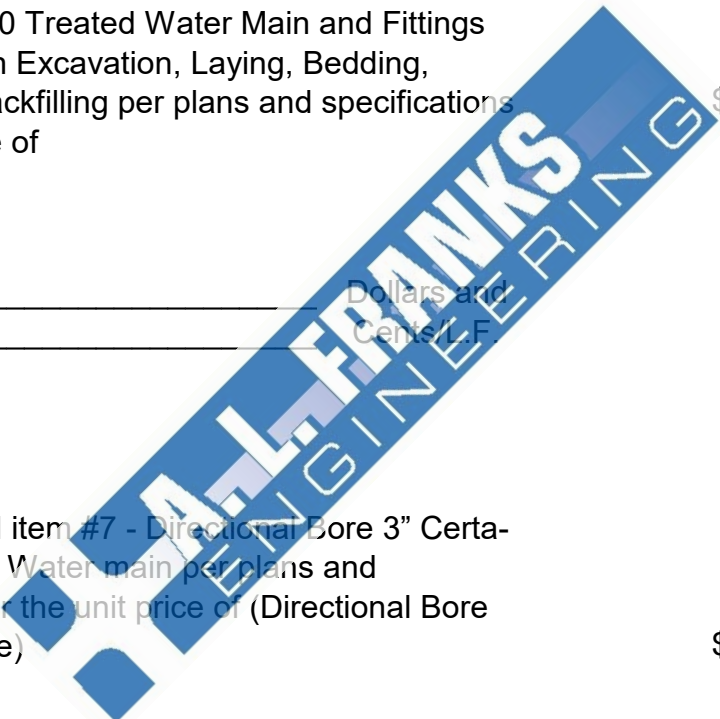

BID PROPOSAL CONTINUED  
DEDUCTIVE ALTERNATE #1

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
23	6	EA	Deduct from Bid item #11 - Furnish and Install and 3/4" Short Side Service including up to 30 feet of service line Connections to existing meters per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
24	2	EA	Deduct from Bid item #12 - Furnish and Install 3/4" Long Side Service including up to 120 feet of service line Connections by Directional Bore to existing meters per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA.	\$ _____	\$ _____
TOTAL DEDUCTIVE ALTERNATE #1				\$ _____	
TOTAL BASE BID LESS DEDUCTIVE ALTERNATE #1				\$ _____	

