

NORTH HOWARD COUNTY, ARKANSAS


10" WATER MAIN REPLACEMENT

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	2457	L.S.	Furnish and Install 10" C-900 Water Main and Fittings including trench excavation, laying, bedding, blocking and backfilling under Type 2 laying conditions per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	1	EA	Furnish and Install 10" M.J. Gate Valve including valve box and blocking per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	2	EA.	Tie-in to 10" Existing Water Main per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
4	30	L.F.	Open Cut and Repair Gravel Driveway per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F	\$ _____	\$ _____

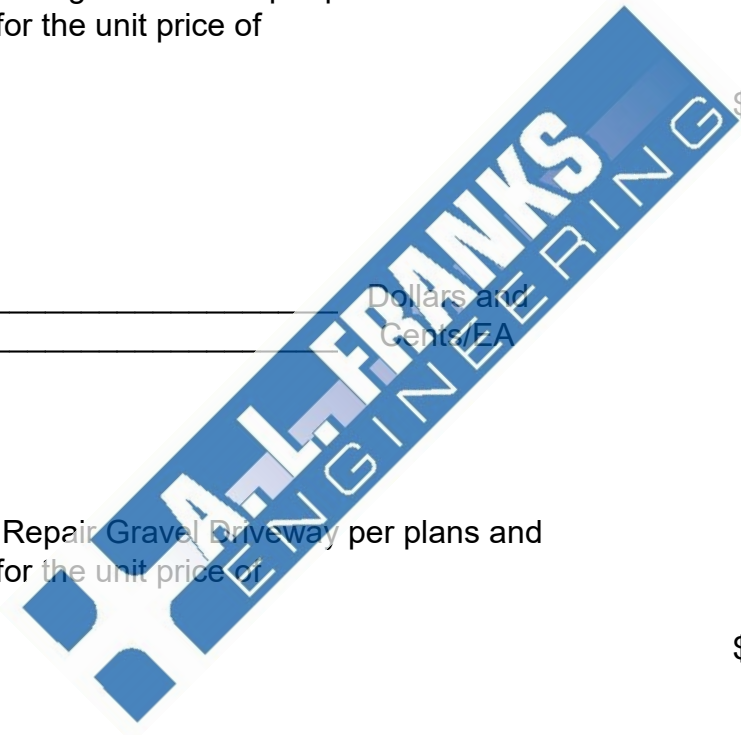

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	1	L.S.	Trench Safety per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
6	1	L.S.	Furnish all labor and install all equipment for testing and sterilization of treated mains and appurtenances per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

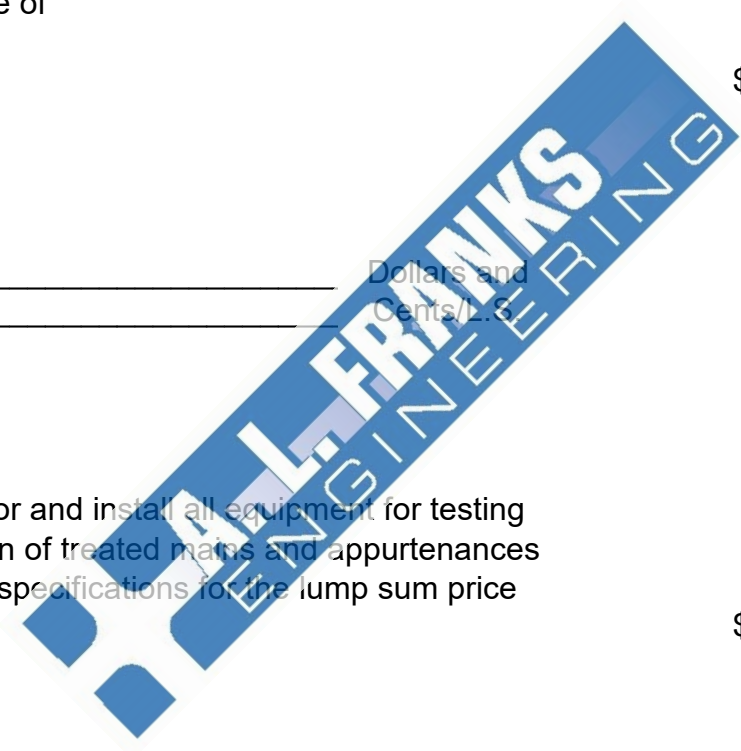

TOTAL OF ALL ITEMS

\$ _____

- NOTES**
- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
 - 2) Time required to complete base bid work shall be 90 calendar days.
 - 3) Contractor is solely responsible for the complete abandonment of all existing mains unless otherwise noted.

